

INSTALLATION INSTRUCTIONS

Tank Pad Kit
14B-F41D0-S0
14B-F41D0-T0
14B-F41D0-U0
14B-F41D0-V0
2009 YZF-R1



⚠ WARNING

Please read and understand these instructions completely before installation to avoid possible injury to yourself or damage to the accessory or vehicle.

DEALER:

These instructions contain important information for future reference and *must* be given to the customer.

WARRANTY INFORMATION:

- Genuine Yamaha components are covered by a one year limited warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. See your Yamaha dealer for a copy of the warranty statement.
- The Limited Warranty provided with new Yamaha vehicles has exclusions for certain failures, including those caused by competition or racing use as well as by abnormal strain or abuse. While installation of these components will not “void” your vehicle’s warranty, specific failures adjudged by Yamaha to have resulted from the installation of accessory components or other modifications, or from competition use, may not be covered by warranty or Yamaha Extended Service.

PARTS LIST:

This kit contains the following components. Before beginning installation, confirm there are no missing or damaged components.

Item	Part Number	Description	Qty
--	14B-F41D0-XX	Tank Pad Kit	--
①	*	Tank Pad	1

* Part supplied with kit only and not available separately.

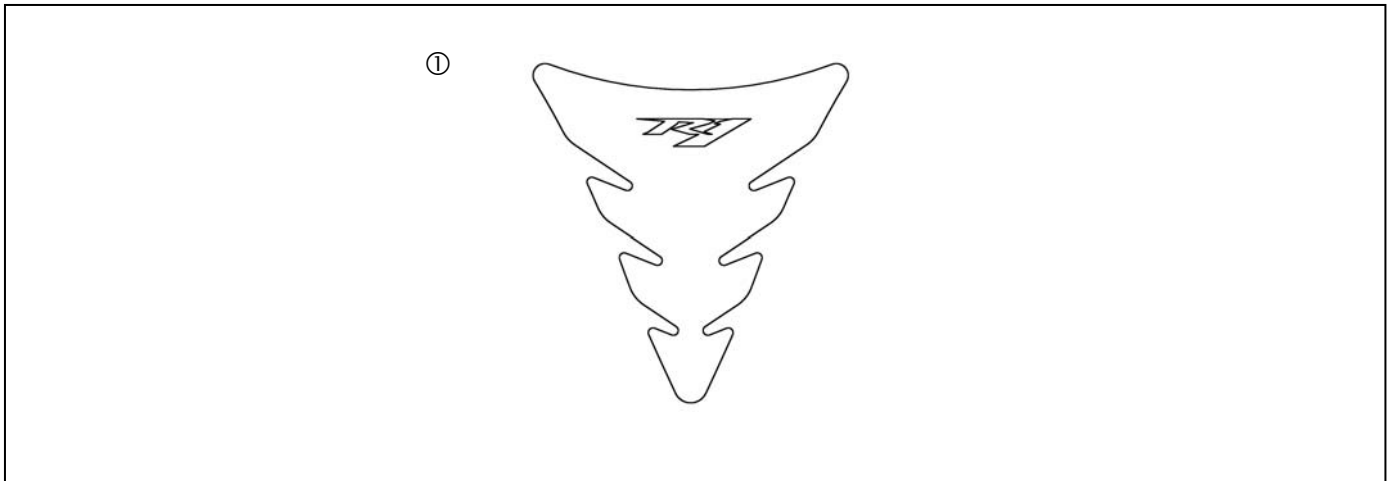


Fig. 1


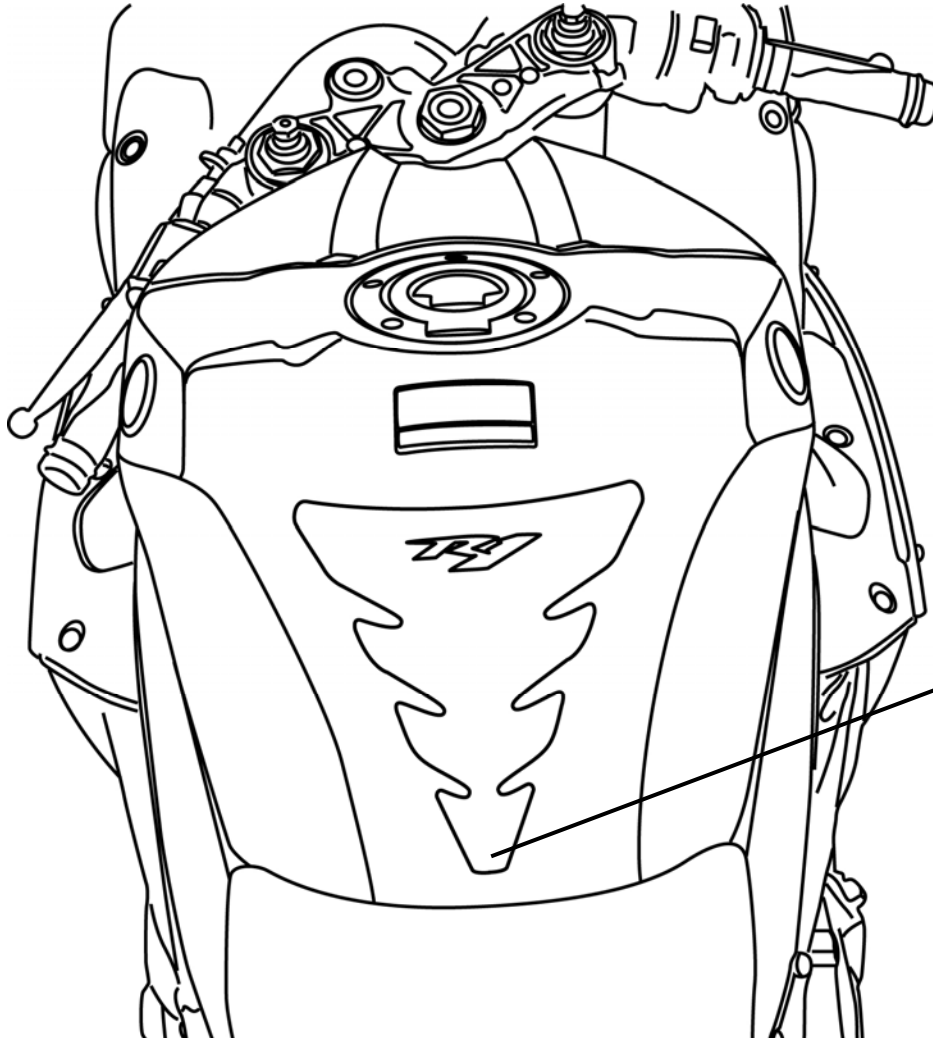


Fig. 1a

PEEL BACK
SMALL
SECTION

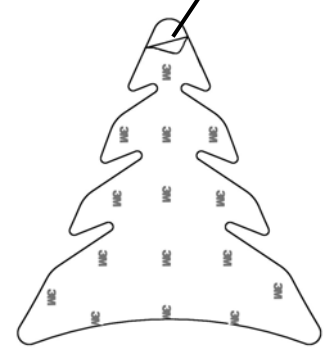

PREPARATION:

1. Place motorcycle on a secure stand.
2. Be sure the fuel tank is free from any dust or other contaminants before applying the pad. Wax or polishes may not allow the pad to adhere properly. It is recommended to clean the mounting area with isopropyl alcohol before applying the pad.

INSTALLATION:

1. Peel back a small section of plastic backing from the bottom edge of the tank pad ① (Fig.1a).
2. Place the bottom edge of the tank pad on fuel tank. Use light pressure to adhere pad in place (Fig. 1).
3. Bring the tank pad into position on tank and adjust to the desired location.

NOTE:

Choose location carefully as the part may be damaged if repositioning is required.

4. Once satisfied with location on the tank, peel off the remaining plastic backing and press tank pad into place.
5. Apply pressure up and out towards the edges in order to avoid air bubble formation.

CARE AND CLEANING:

Wash using a mild soap and water solution and a soft cloth. Avoid harsh cleaners or solvents.

CUSTOMER SERVICE:

For further information, see your Yamaha dealer.

ESTIMATED TIME TO INSTALL: 0.1 HRS