

## INSTALLATION INSTRUCTIONS

DESCRIPTION: Tank Pad Kit  
PART # 1WS-F41D0-V0  
MODEL: FZ-07




### **⚠ WARNING**

Please read and understand these instructions completely before installation to avoid possible injury to yourself, or damage to the accessory or vehicle.

### **WARRANTY INFORMATION:**



Genuine Yamaha accessories are covered by a one-year limited warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. See your Yamaha dealer for a copy of the warranty statement.

### **PARTS LIST:**

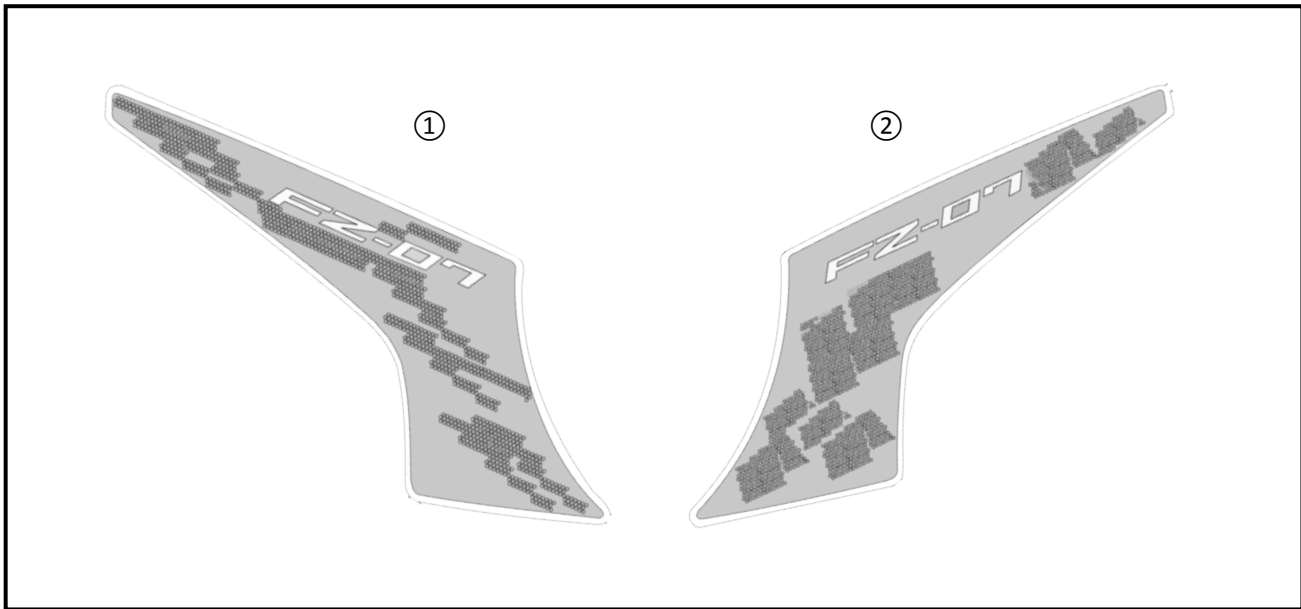

No.	Part Number	Description	Qty
--	1WS-F41D0-V0	Tank Pad Kit	--
①	*	Left Side Pad	1
②	*	Right Side Pad	1

\* Part supplied with kit only and not available separately.

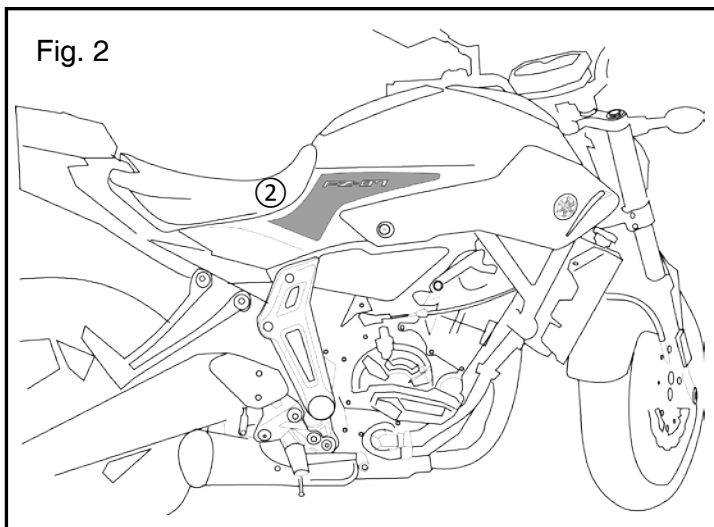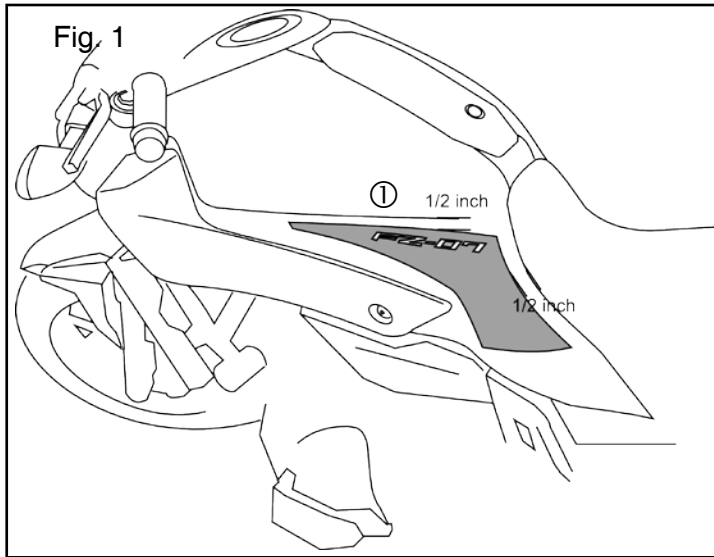

#### PREPARATION:

1. Stand motorcycle on a secure and level surface.
2. Installation should be done out of direct sunlight with the motorcycle mount surfaces between 60° and 70° F (15-21°C).
3. Use a degreasing agent such as Yamaclean® Pro-Wash Spray (p/n ACC-YAMAC-PW-SP) to clean the mount surfaces on the tank.

#### INSTALLATION:

1. Start on the left side with the left side tank protector ①. As Fig. 1 shows, the recommended placement is 1/2" (1.3 cm) between the seat and pad and 1/2" (1.3 cm) between the body line on the tank and pad.

2. Place the pad in the position you prefer. When you are satisfied with the position on the tank, peel the paper cover from the adhesive on the back side of the tank pad and press to seal.

**NOTICE:** If you accidentally put the pad in the wrong place, you can peel it up right after installation and reposition it, but peel carefully to avoid damaging the adhesive.

3. Using hand pressure, move from the center towards the edges of the pad to remove any air bubbles from under the mounting surface.
4. Repeat steps 1 through 3 with the right side pad ② (Fig. 2).
5. Remove the clear plastic film from the surface of both pads.

#### CARE AND CLEANING:

Wash using a mild soap and water solution and soft cloth.

#### CUSTOMER SERVICE:

For further information see your Yamaha dealer.

**ESTIMATED TIME TO INSTALL: 0.1 HRS**