

INSTALLATION INSTRUCTIONS
Tinted Windscreen Standard
ABA-13S03-20-00
2008 YZF-R6



⚠ WARNING

Please read and understand these instructions completely before installation to avoid possible injury to yourself, or damage to the accessory or vehicle.

CAUTION:

- This installation should be performed by an authorized Yamaha dealer or a qualified mechanic. Some components require information from the model's service manual for proper installation or adjustment. Be sure to have the service manual on hand, if necessary, before proceeding with the installation.
- Alteration of emission-related components constitutes tampering under Federal and State laws and can lead to substantial fines and penalties if used other than in closed-course competition.
- Engine-related competition parts are intended for closed-course racing applications only.

DEALER:

These instructions contain important information for future reference and *must* be given to the customer.

WARRANTY INFORMATION:

- Genuine Yamaha components are covered by a 90-day warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. See your Yamaha dealer for a copy of the warranty statement.
- The Limited Warranty provided with new Yamaha vehicles has exclusions for certain failures, including those caused by competition or racing use (except YZ and WR motorcycle models) as well as by abnormal strain or abuse. While installation of these components will not "void" your vehicle's warranty, specific failures adjudged by Yamaha to have resulted from the installation of accessory components or other modifications, or from competition use (except YZ and WR motorcycle models), may not be covered by warranty or Yamaha Extended Service.



1. PARTS LIST:

This kit contains the following components. Before beginning installation confirm there are no missing or damaged components.

Item #	Part Number	Description	Qty
1	ABA-13S03-20-00	Tinted Windscreen, Standard	1

Item #1



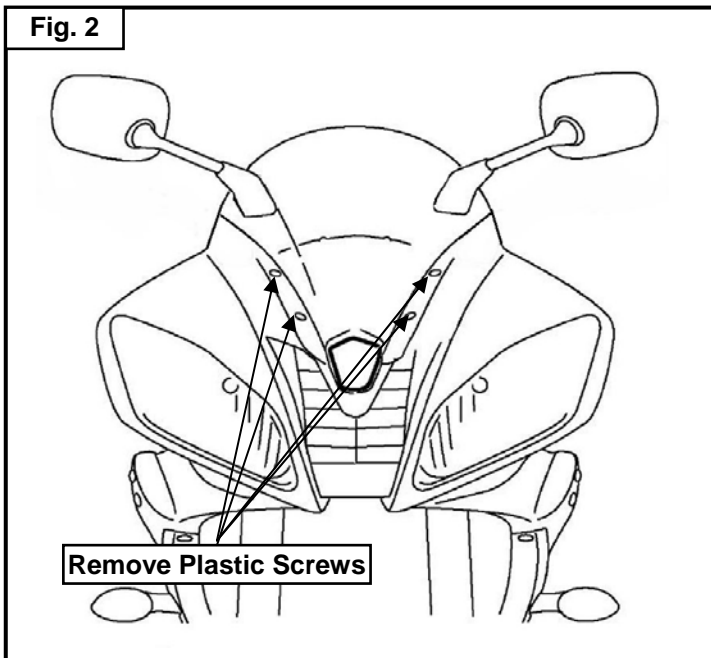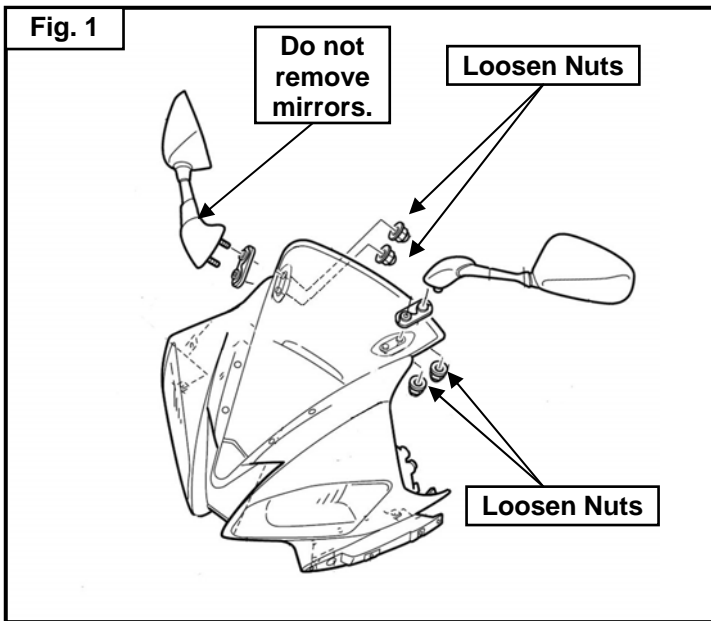

PREPARATION:

- Place motorcycle on a secure stand.
- Clean all mounting surfaces before beginning installation.

CAUTION:

Removal of the windscreen and mirrors loosens mounting fasteners. Take care not to lose bushings, nuts, and rubber grommets behind fairing, as they are difficult to retrieve.

2. INSTALLATION:

- Loosen four nuts that secure the mirrors to the stock windscreen. (Fig. 1)
- Do not remove mirror assemblies.
- Remove four plastic screws holding the stock windscreen in place. Retain plastic screws as they will be re-used. (Fig. 2)
- Remove stock windscreen.
- Install new windscreen and secure in place with stock plastic screws. Do not over tighten plastic screws.
- Tighten mirror nuts to factory specifications.
Torque mirror nuts to 7 Nm (5.1 ft • lb)

3. MAINTENANCE:

Periodically check all hardware for tightness and re-torque as required.

4. CARE AND CLEANING:

Wash with Yamaha Windscreen Cleaner (ACC-WNDSC-CL-NR) and a soft cloth. Do not use RainX®, ammonia-based glass cleaners or paper towels, as these may damage the polycarbonate surface.

5. CUSTOMER SERVICE:

For further information see your Yamaha dealer.

ESTIMATED TIME TO INSTALL: 0.3 HRS