

**INSTALLATION INSTRUCTIONS**

DESCRIPTION: Accessory Light Kit  
 PART NUMBER: 2HC-H4104-V0 (Spot)  
 2HC-H4104-L0 (Flood)  
 MODEL: YXZ1000



**⚠ WARNING**

Please read and understand these instructions completely before installation to avoid possible injury, or damage to the accessory or vehicle.

**NOTICES:**

This installation requires a torque wrench and should be performed by an authorized Yamaha dealer or other qualified technician.

**WARRANTY INFORMATION:**

Genuine Yamaha Accessories are covered by a one-year limited warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. See your Yamaha dealer for a copy of the warranty statement.

**DEALER OR INSTALLER:**

These instructions contain important information for future reference and *must* be given to the customer.


This Accessory Light Kit can be used in conjunction with other optional kits.


- Switch Plate Kit 2HC-H35B0-V0, 2<sup>nd</sup> Battery Kit 2HC-H212A-V0, 2<sup>nd</sup> Battery Wiring Harness Kit 2HC-H21B0-V0.

**PARTS LIST:**

No.	Part Number	Description	Qty
--	2HC-H4104-V0 (Spot)  2HC- H4104-L0	Accessory Light Kit	--
①	*	Auxiliary Light Assembly	2
②	*	Wiring Harness	1

\* Part supplied with kit only and not available separately.

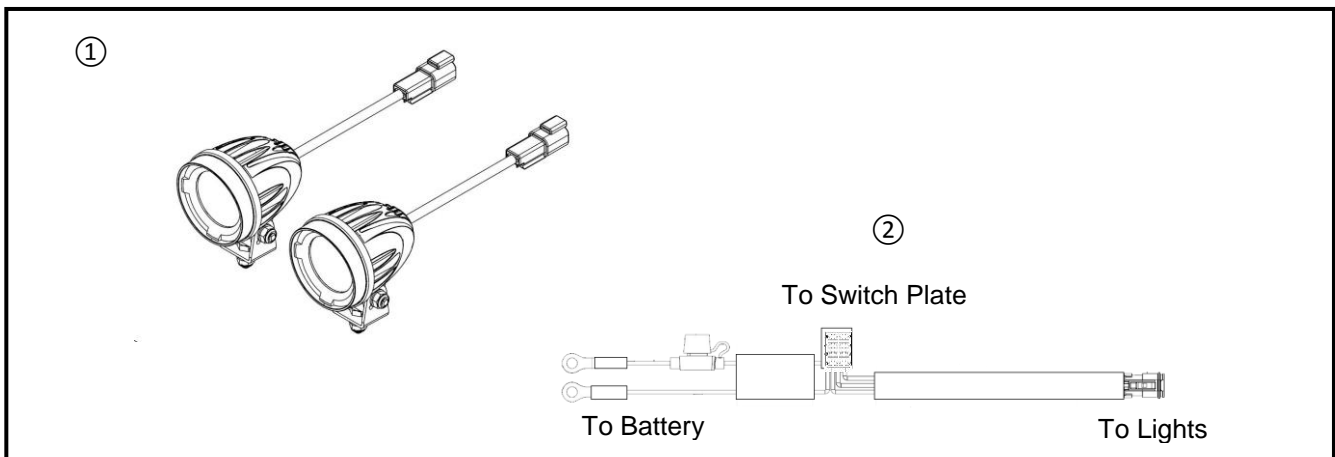

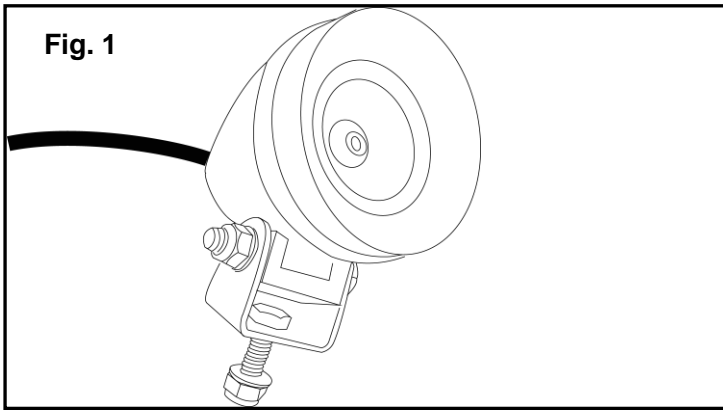

**PREPARATION:**

- Park the vehicle on a secure and level surface.
- Clean all mounting surfaces before beginning installation.

**INSTALLATION:**

1. You can install these lights to any location that will support the weight and provide a stable and secure mount.

**Note:** The lights have a bolt, washer, and nut as shown in Fig. 1 that can be used to install the swivel mount.

2. Route the wire harness to avoid chaffing, rubbing, kinks, and friction
3. Install the ring terminals on the Wire Harness to the correct (+ or -) terminal on the Main Battery or Auxiliary Battery Terminal (if it is installed on the vehicle).
4. Plug the connector on the Wire Harness into the connectors on the Lights.
5. The switch in the Wire Harness is a rocker switch – it has an 'On' and an 'Off' position. This switch can be mounted in the Switch Panel (P/N 2HC-H2570-V0).
6. Torque the mount bolt to 10Nm (7.4 ft-lbf).

**MAINTENANCE:**

Periodically, check torque on all hardware. If loose hardware is found, re-torque to specification. Periodically inspect accessory wiring for chaffing and rubbing and adjust position and cable ties as needed.

**CARE AND CLEANING:**

Clean the light assembly with a clean soft cloth and mild soap and water. Rinse and dry.

**CUSTOMER SERVICE:**

For further information see your Yamaha dealer.

**ESTIMATED TIME TO INSTALL: .5 HRS**