INSTALLATION INSTRUCTIONS

DESCRIPTION: **Rear Seat Cowl Kit**
PART NUMBER: **2CR-F47F0-*xx* (various colors)**
MODEL: **2015~ YZF-R1**

YAMAHA
GENUINE
Parts & Accessories

⚠WARNING

Please read and understand these instructions completely before installation to avoid possible injury, or damage to the accessory or vehicle.

NOTICE:

Installation of this kit requires a torque wrench. This installation should be performed by an authorized Yamaha dealer or a qualified mechanic.

WARRANTY INFORMATION:
Yamaha Genuine Accessories are covered by a one-year limited warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. See your Yamaha dealer for a copy of the warranty statement.
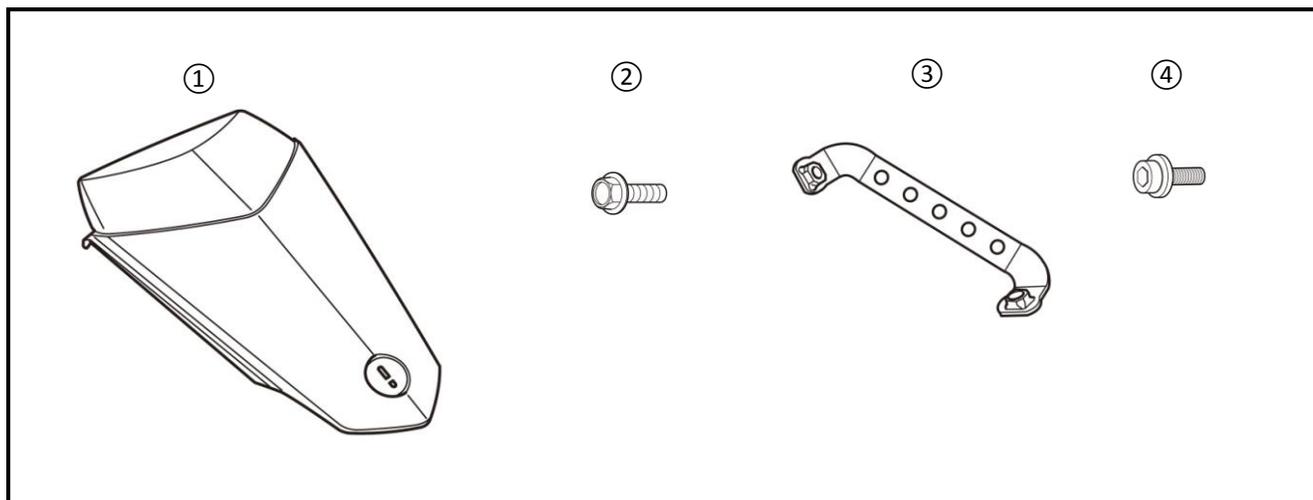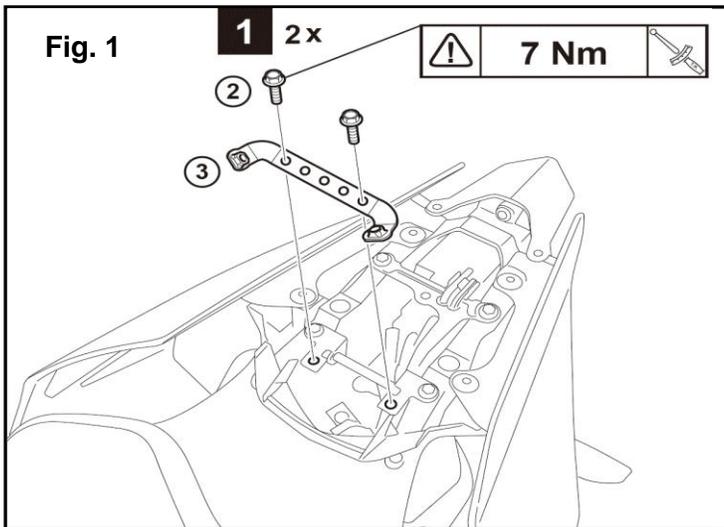
DEALER OR INSTALLER:
These instructions contain important information for future reference and *must* be given to the customer.

PARTS LIST:

No.	Part Number	Description	Qty
--	2CR-F47F0-xx	Rear Seat Cowl Kit	--
①	*	Seat Cowl	1
②	*	M6 x 12mm Hex Head Bolt	2
③	*	Support	1
④	*	M6 x 16mm Hex Cap Bolt	2

* Part supplied with kit only and not available separately.

Fig. 1

| 1 | 2x | ⚠ | 7 Nm | 🪛 |

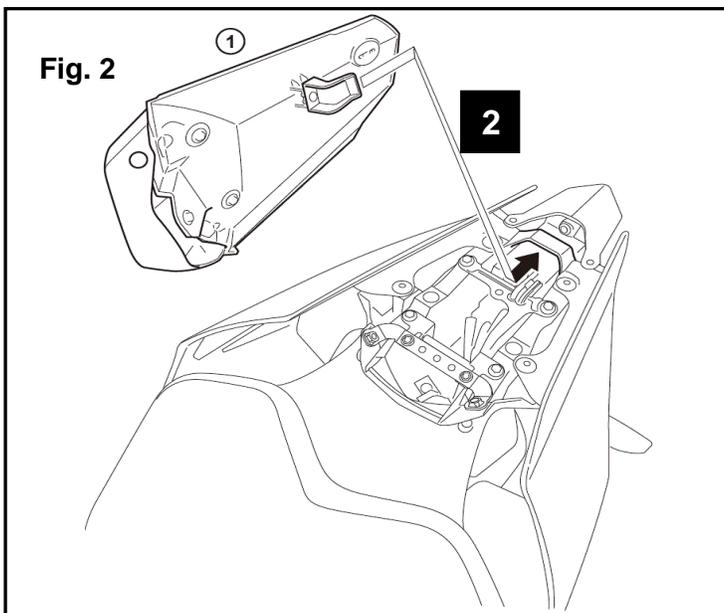**Fig. 2**

2

Fig. 3

| 4 | ⚠ | 2 Nm | 🪛 |

3 2x

PREPARATION:
- Stand motorcycle on a secure and level surface.
- Clean all mounting surfaces before beginning installation.

INSTALLATION:

1 Install the Support ③ by threading two M6 x 12mm Hex Head Bolts ② through the Support ③ and into the mount holes on the motorcycle as shown in Fig. 1. Torque bolts to 7 Nm (0.7 m-kgf, 5.16 ft-lbf)

2 Install the Seat Cowl ① to the motorcycle. Set the hook into the mount slot as shown in Fig. 2.

3 Install the two M6 x 16mm Hex Cap Bolts ④ to secure the Seat Cowl ① to the motorcycle. Torque these bolts to 2 Nm (0.2 m-kgf, 1.48 ft-lbf) as shown in Fig. 3.

MAINTENANCE:
Periodically, check torque on all hardware. If loose hardware is found, re-torque to specification.

CARE AND CLEANING:
Clean seat cowl with a clean soft cloth and mild soap and water. Rinse and dry.

CUSTOMER SERVICE:
For further information see your Yamaha dealer.

ESTIMATED TIME TO INSTALL: 0.3 HRS.