



**INSTALLATION INSTRUCTIONS**  
**GYTR Glide Plate Kit**  
**GYT-5B634-00-AL**  
**2008 TTR-110**



**⚠ WARNING**

Please read and understand these instructions completely before installation to avoid possible injury to yourself, or damage to the accessory or vehicle.

**CAUTION:**

- This installation should be performed by an authorized Yamaha dealer or a qualified mechanic. Some components require information from the model’s service manual for proper installation or adjustment. Be sure to have the service manual on hand, if necessary, before proceeding with the installation.
- Alteration of emission-related components constitutes tampering under Federal and State laws and can lead to substantial fines and penalties if used other than in closed-course competition.
- Engine-related competition parts are intended for closed-course racing applications only.

**DEALER:**

These instructions contain important information for future reference and *must* be given to the customer.

**WARRANTY INFORMATION:**


- Genuine Yamaha GYTR components are covered by a 90-day warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. See your Yamaha dealer for a copy of the warranty statement.
- The Limited Warranty provided with new Yamaha vehicles has exclusions for certain failures, including those caused by competition or racing use (except YZ and WR motorcycle models) as well as by abnormal strain or abuse. While installation of these GYTR components will not “void” your vehicle’s warranty, specific failures adjudged by Yamaha to have resulted from the installation of accessory components or other modifications, or from competition use (except YZ and WR motorcycle models), may not be covered by warranty or Yamaha Extended Service.



**1. PARTS LIST:**

This kit contains the following components. Before beginning installation confirm there are no missing or damaged components.

Item #	Part Number	Description	Qty
1	GYT-5B634-00-AL	GYTR Glide Plate Kit	1
2	*	Hex Flange Head Bolt (M8 x 1.25 x25mm)	2
3	*	Flat Washer (M8)	2

\* Part supplied with kit only and not available separately.

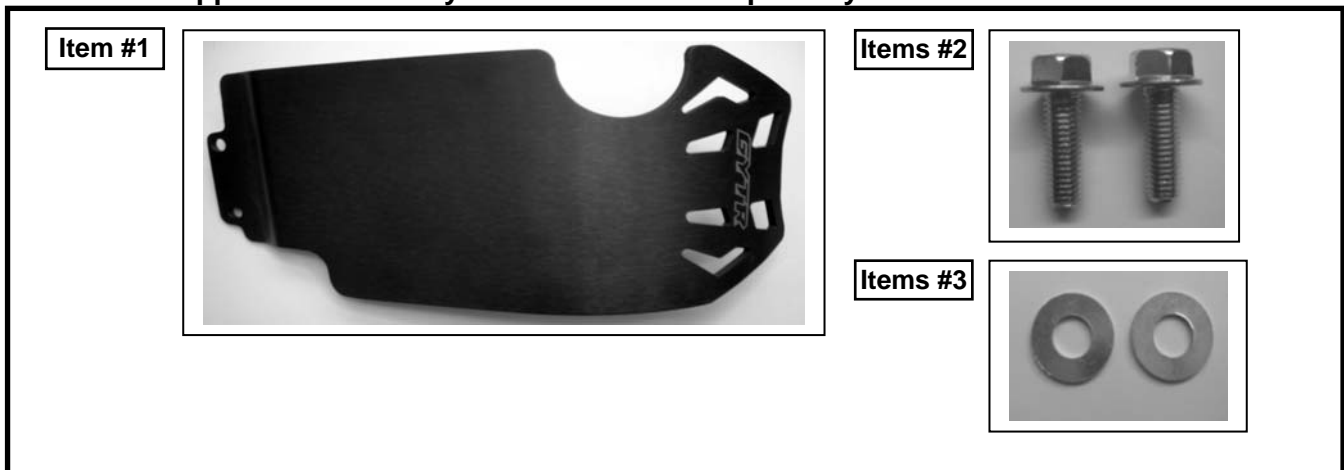

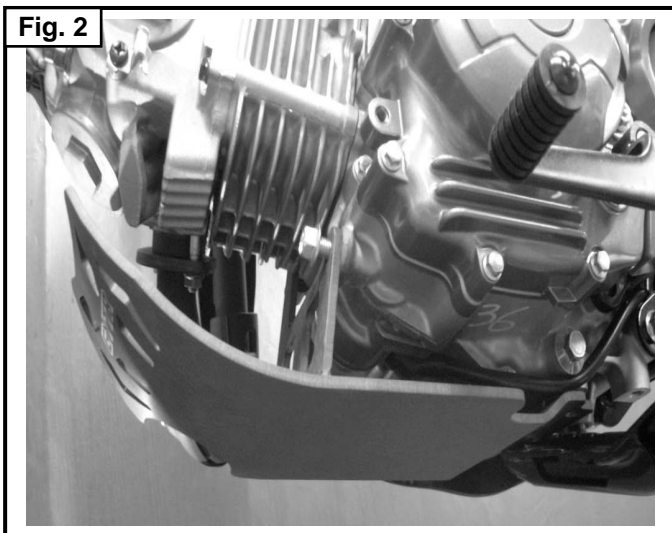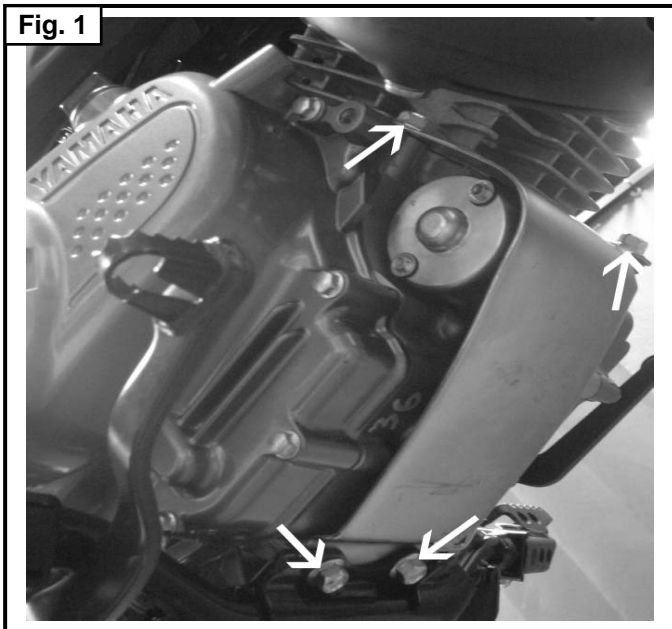

## 2. PREPARATION:

- Place motorcycle on a secure stand.
- Clean all mounting surfaces before beginning installation.

## 3. INSTALLATION:

### NOTE:

Use Loctite® 242 Threadlocker on each fastener to prevent loosening while riding.

- Loosen rear footrest bracket bolts and remove the two upper bolts. The two rear bolts will be replaced with longer fasteners. (Refer to service manual).
- Remove starting motor cover and retain upper bolts for installation of GYTR glide plate. (Refer to service manual). (Fig .1)
- Install GYTR Glide Plate rear bolts in the following manner:  
M8 washers, then footrest bracket, GYTR Glide Plate and then the supplied M8 bolts.
- Re-install upper fasteners and hand-tighten them.

- Tighten footrest bracket.

Torque footrest bracket bolts to 30 Nm (22 ft • lb)

Torque upper GYTR Glide Plate bolts to 23 NM (17 ft • lb)

## 4. MAINTENANCE:

Periodically check torque on all hardware. If loose hardware is found, remove hardware, clean off old Loctite®, re-apply fresh Loctite® and re-torque to specification.

## 5. CARE AND CLEANING:

Wash using a mild soap and water solution and soft cloth. Protect the finish with Yamaha Ultragloss Cleaner Wax (ACC-ULTRA-CL-WX).

## 6. CUSTOMER SERVICE:

For further information see your Yamaha dealer.

**ESTIMATED TIME TO INSTALL: 0.3 HRS**