

## INSTALLATION INSTRUCTIONS

DESCRIPTION: Rear 4 Point Harness Kit  
PART NUMBER: B4J-F47K0-V0  
MODEL: 2021+ Wolverine X4 and RMax4



### **⚠ WARNING**

Please read and understand these instructions completely before installation to avoid possible injury, or damage to the accessory or vehicle. Failure to install seat belts correctly could result in serious injury or death. Check harness fit before and during each ride. Rough riding will tend to settle belts and loosen them.

### **NOTICE:**

Installation of this kit requires a torque wrench and should be performed by an authorized Yamaha dealer or a qualified mechanic.

### **WARRANTY INFORMATION:**

In the United States, see your Yamaha dealer for a copy of the Yamaha Genuine Parts and Accessories Limited Warranty.


### **DEALER OR INSTALLER:**




These instructions contain important information for future reference and *must* be given to the customer.

### **PARTS LIST:**

No.	Part Number	Description	Qty
--	<b>B4J-F47K0-V0</b>	Rear 4 Point Harness Kit	--
①	B57-F470M-V0	Rear Seat Harnesses	2

\* Part supplied with kit only and not available separately.

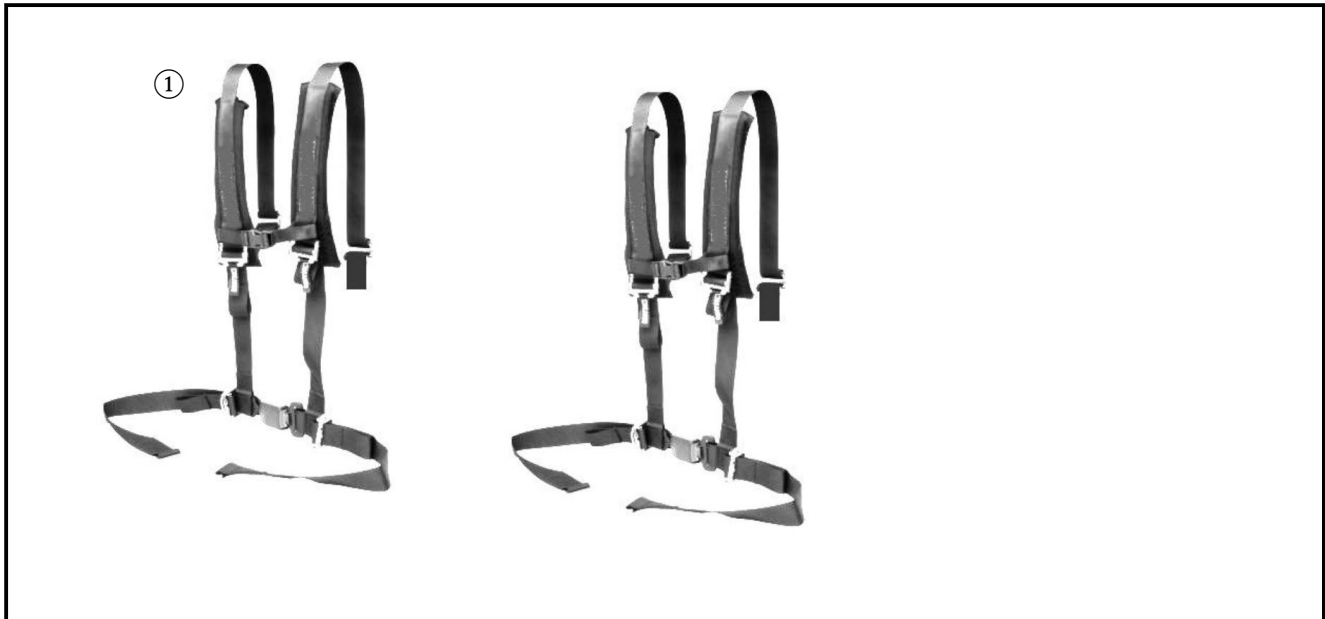

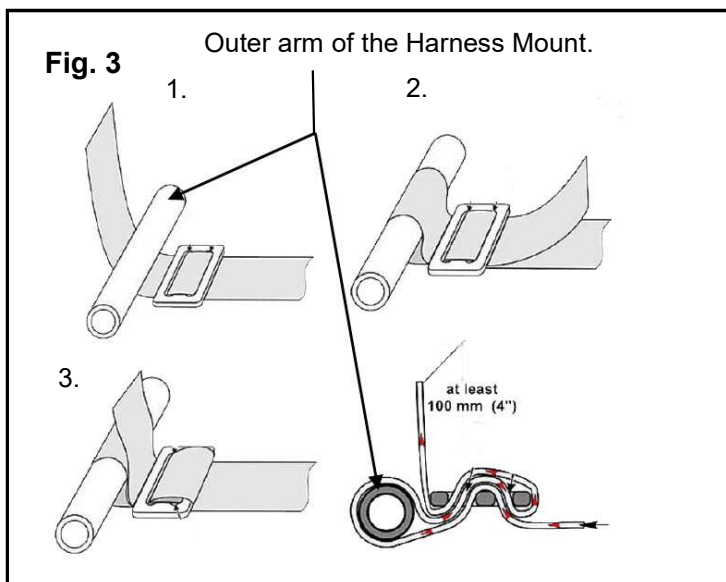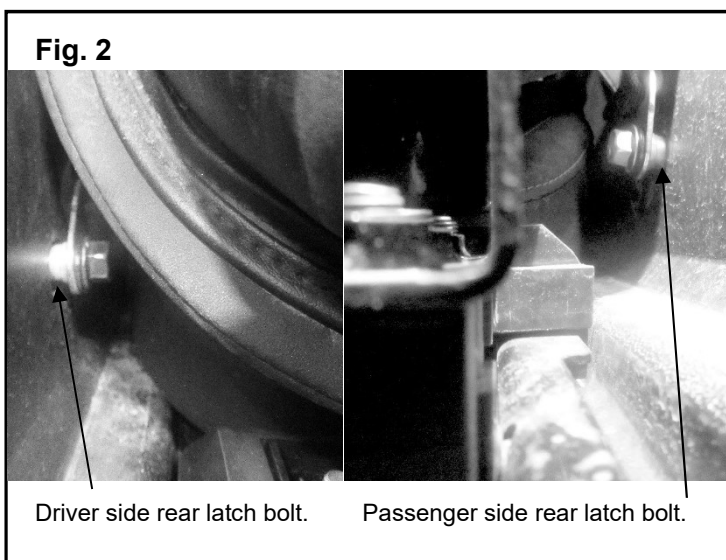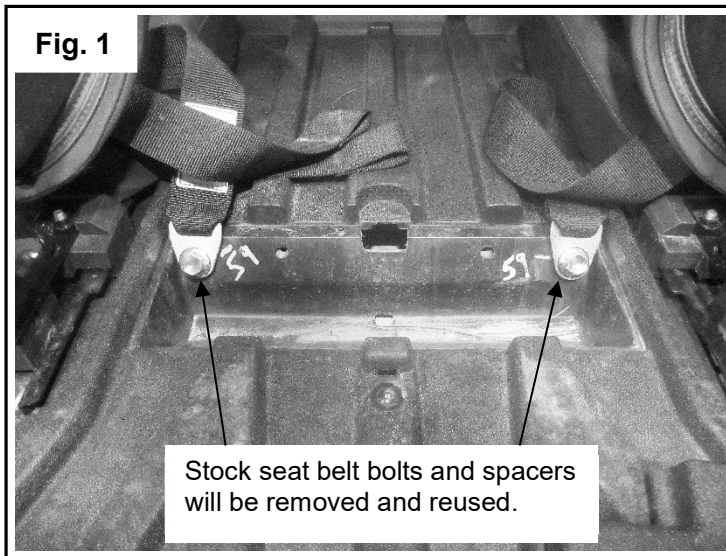


## PREPARATION:

- Place the vehicle on a secure and level surface.
- Set the parking brake.
- Clean the mounting surfaces before beginning installation.
- Install **B4J-F47P0-V0 4 Point Harness Mount Kit** to the rear cross over tube on the ROPS **before** installing this kit.

## INSTALLATION:

1. Move the rear seats forward and remove the stock seat belts. Retain the lower receiver hardware for reuse. (Fig. 1 and 2)
2. Attach the eyelets from the ① Rear 4 Point Harness to the stock locations with the stock bolts and spacers. Torque all the stock bolts to 59Nm (5.9 m-kg or 43.5 lb-ft). (Fig. 1 and 2)
3. Wrap the ① 4 Point Harness shoulder straps (2 per seat) to the Harness Mounts behind seats. Route them into the Seat Protectors. Adjust belt and buckle to your desired length. (Fig. 3 image 1 and 2)
4. Seat the occupant in the vehicle and adjust the lap belts first. Lift the buckle side loop and pull slack down until the belt lays flat across their lap.
5. Adjust shoulder harness straps next. Sit straight in the seat and pull down to remove slack in the straps. Harness straps should be snug, but comfortable. (Note: the sternum strap should be at least 4" below the neck line). Check to ensure slack will not snag on moving parts or trail hazards before riding.
6. Keep tension on the first wrap and feed slack through the bottom front side of buckle, then pull tight as shown in Fig. 3. Wrap remaining slack up and over buckle, feeding through the top slot (from the front side) and pull the strap tight. This will set the adjustment of the upper harness straps. (Fig. 3 image 3)  
**Note:** If the rear seats are unoccupied then tighten the rear 4 point harnesses so they do not move around.

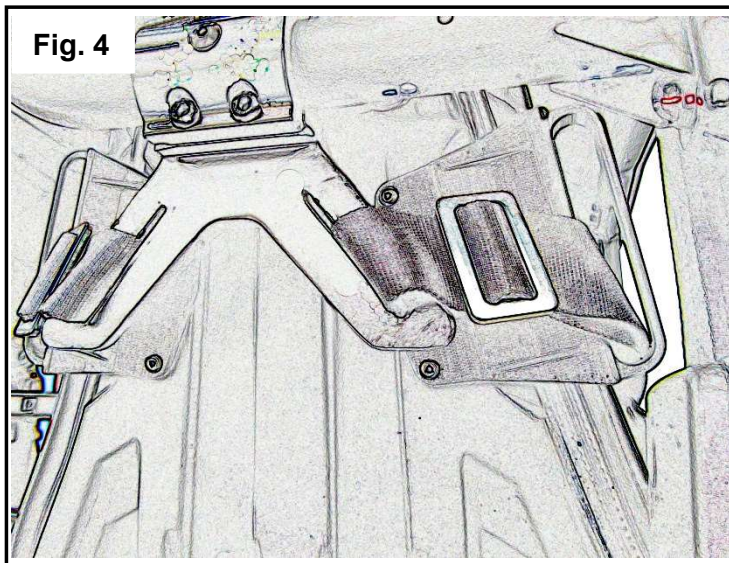

**MAINTENANCE:**

Periodically, check torque on all hardware. If loose hardware is found, re-torque to specification.

**CARE AND CLEANING:**

Clean painted metal parts with a clean soft cloth and mild soap and water solution. Rinse and dry.

**CUSTOMER SERVICE:**

For further information see your Yamaha dealer.

**ESTIMATED TIME TO INSTALL: 0.5 HRS.**