

INSTALLATION INSTRUCTIONS

DESCRIPTION: Top Case Mount
PART NUMBER: B9T-F84AB-V0
MODEL: '20 MT-03



⚠ WARNING

Please read and understand these instructions completely before installation to avoid possible injury, or damage to the accessory or vehicle.

NOTICE:

Installation of this kit requires a torque wrench and should be performed by an authorized Yamaha dealer or a qualified mechanic.

WARRANTY INFORMATION:

In the United States, see your Yamaha dealer for a copy of the Yamaha Genuine Parts and Accessories Limited Warranty.

DEALER OR INSTALLER:

These instructions contain important information for future reference and *must* be given to the customer.

The B9T-F48D0-V0 Rear Rack is required for use with this kit.
This kit allows for the use of 39L Top Case 2PP-F84A8-V0.

PARTS LIST:

No.	Part Number	Description	Qty
--	B9T-F84AB-V0	Top Case Mount	-
①	-	Top Case Mount	1
②	-	T30-6mmx30mm Flange Bolts	4
③	-	T30-6mmx20mm Flange Bolts	4
④	-	M6 Nyloc Nuts	4
⑤	-	6mm x 12mm OD washers	4
⑥	-	6mm x 15mm OD washers	4
⑦	-	6mm x 25 OD washers	2
⑧	-	Slotted square washers	4
⑨	-	Retainer Brackets	4

* Part supplied with kit only and not available separately.



Fig. 1

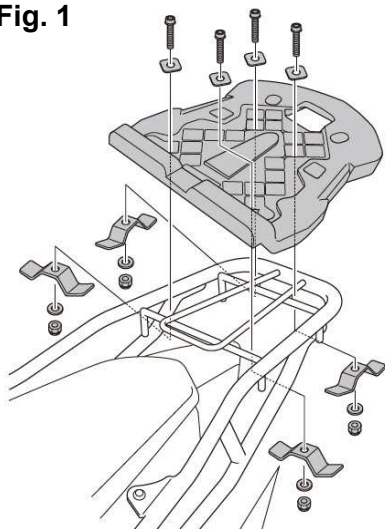


Fig. 2


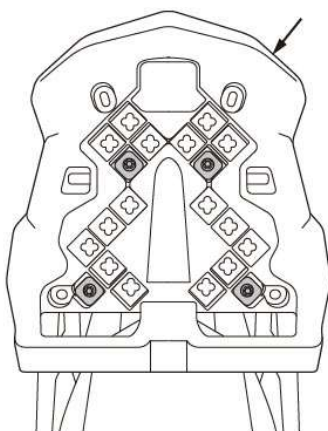


Fig. 3

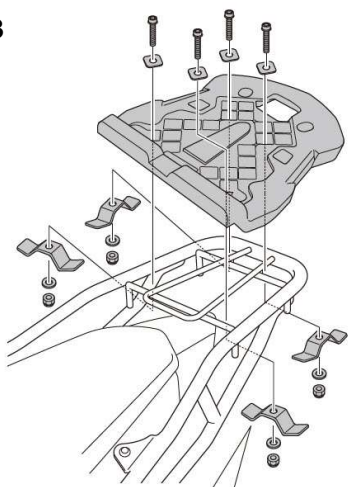

PREPARATION:

- Place the vehicle on a secure and level surface.
- Clean the mount surfaces before beginning installation.

INSTALLATION:

Long Bar Luggage Rack:

1. Align the ① Top Case Mount on top of the long bar luggage rack. (Fig. 1)
2. Insert ② T30-6mmx30mm Flange Bolts through the ⑧ Slotted square washers and into the mounting locations in the ① Top Case Mount. (Fig. 2)
3. Thread the ⑥ 6mm x 15mm OD washers and ④ M6 Nyloc Nuts onto the ② T30-6mmx30mm Flange Bolts. (Fig.3)
4. Tighten the hardware to 7Nm (0.7 kg-m or 5.1 lb-ft).

Note: Items 3, 5 and 7 are not used in this kit.

MAINTENANCE:

Periodically, check torque on all hardware. If loose hardware is found, re-torque to specification.

CARE AND CLEANING:

Clean painted metal parts with a clean soft cloth and mild soap and water solution. Rinse and dry.

CUSTOMER SERVICE:

For further information see your Yamaha dealer.

ESTIMATED TIME TO INSTALL: 0.5 HRS.

