

INSTALLATION INSTRUCTIONS

DESCRIPTION: **Seat Bag Kit**
 PART NUMBER: **1WD-F47G0-XX (Various Colors)**
 MODEL: **YZF-R3**



⚠ WARNING

Please read and understand these instructions completely before installation to avoid possible injury, or damage to the accessory or vehicle.

- The Seat Bag is not a seat.
- Do not carry a passenger on it or allow anyone to sit on it, even at rest.
- Ensure seat bag is properly secure before riding.
- Do not put pointed, sharp, or heavy objects inside the seat bag compartment.
- Do not exceed the 10 Lb (4.5 Kg) load limit of the seat bag. An overloaded bag could affect vehicle handling resulting in an accident.
- The total weight of the operator, passenger, accessories and cargo must not exceed the maximum load limit stated in the Owner's Manual.

WARRANTY INFORMATION:

Genuine Yamaha Accessories are covered by a one-year limited warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. See your Yamaha dealer for a copy of the warranty statement.

DEALER OR INSTALLER:

These instructions contain important information for future reference and *must* be given to the customer.

NOTICE:

Ensure the seat bag is properly secured to the motorcycle before riding.

PARTS LIST:

No.	Part Number	Description	Qty
--	1WD-F47G0-XX	Seat Bag Kit	--
①	*	Seat Bag	1

* Part supplied with kit only and not available separately.

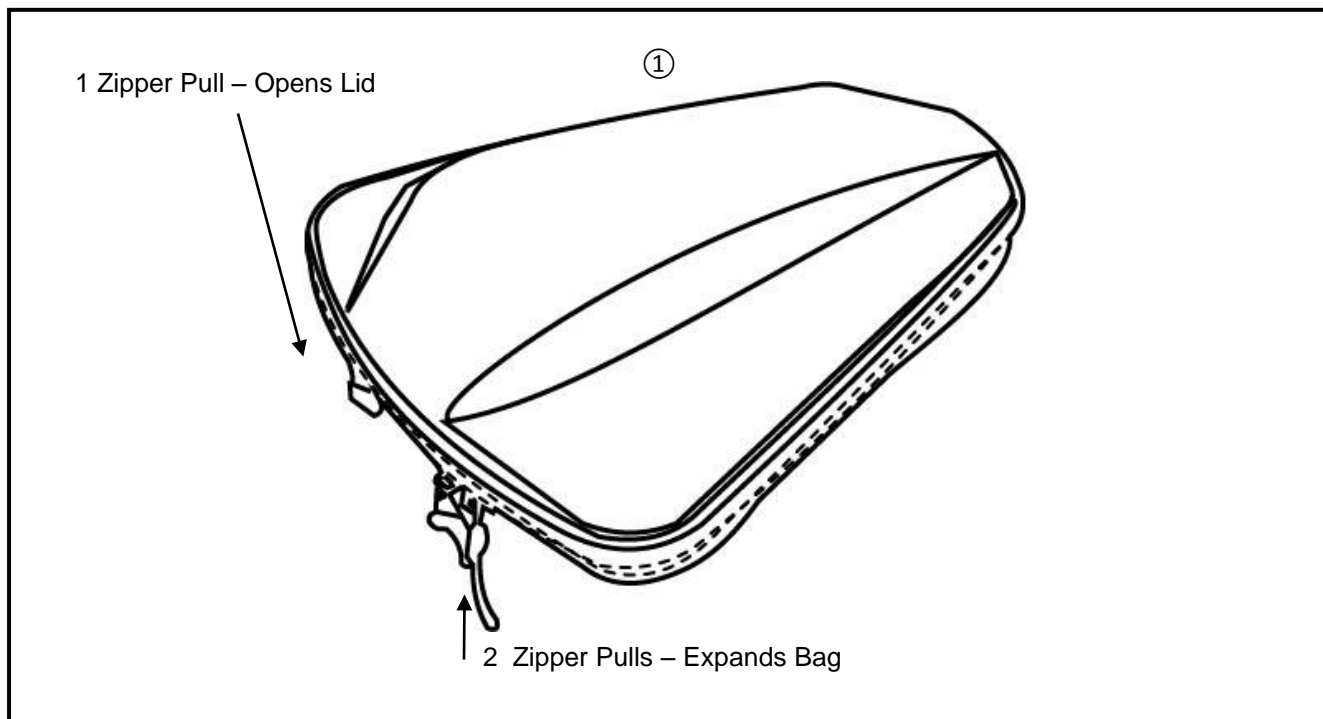


Fig. 1

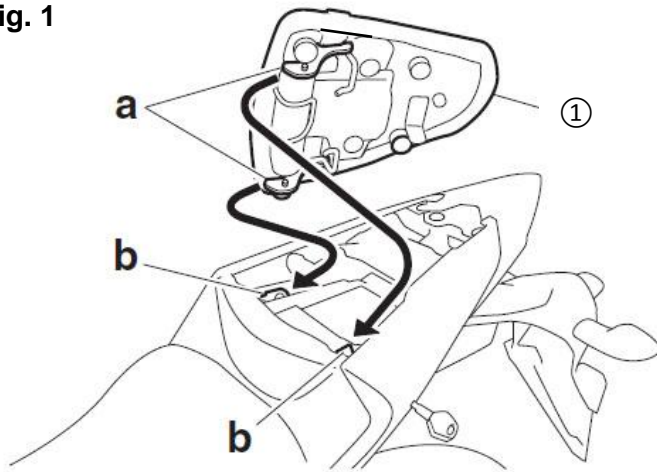


Fig. 2


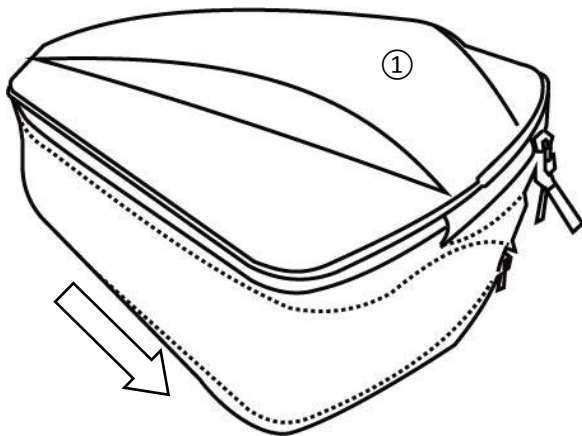


Fig. 3

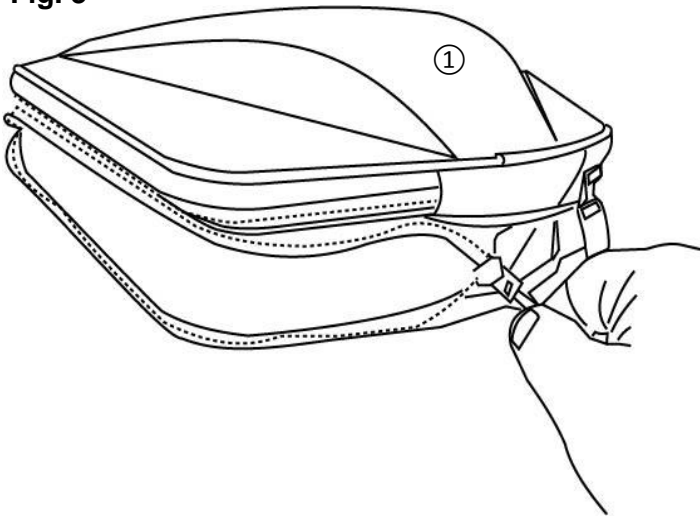

PREPARATION:

- Stand motorcycle on a secure and level surface.
- Clean all mounting surfaces before beginning installation.

INSTALLATION:

Remove the stock passenger seat.

1. Insert ignition key in seat lock and turn counter clockwise.
2. While holding the key in that position (counter clockwise), lift the front of the passenger seat and pull it forward. The stock seat will not be reused in this installation.

Install the Seat Bag

3. Get the Seat Bag and insert the projections "a" on the front of the seat bag into the grooves "b" as shown in Fig. 1 and then push the rear of the seat bag down to lock it in place.
4. Remove ignition key from seat lock to complete installation.

⚠WARNING

- Always make sure the seat bag is properly secured before riding.
- Seat Bag should not be used to carry passengers.

Opening and Expanding the Seat Bag.

5. Open the bag by unzipping the top most zipper.
6. Expand the bag by unzipping both the lower zippers (Fig. 2).
7. Zip the lower zipper channel closed to compress the bag back onto the base as shown in Fig. 3.

MAINTENANCE:

Periodically check all hardware for tightness and secure as necessary.

CARE AND CLEANING:

Wash using a mild soap and water solution and soft cloth. Ensure bag is dry before storing.

CUSTOMER SERVICE:

For further information see your Yamaha dealer.

ESTIMATED TIME TO INSTALL: 0.1 HR