

INSTALLATION INSTRUCTIONS

DESCRIPTION: Rear Window Kit

PART NUMBER: B5H-K750A-V0

MODEL: '19~ YZX1000R



⚠ WARNING

Please read and understand these instructions completely before installation to avoid possible injury, or damage to the accessory or vehicle.

- Do not tow the vehicle on an open trailer with this accessory installed, as the accessory is not designed for use at highway speeds.

WARRANTY INFORMATION:

In the United States, see your Yamaha dealer for a copy of the Genuine Yamaha Parts and Accessories Limited Warranty statement.

NOTICE:

This Installation can be performed by the owner.


DEALER OR INSTALLER:




These instructions contain important information for future reference and *must* be given to the customer.

PARTS LIST:

No.	Part Number	Description	Qty
--	B5H-K750A-V0	Rear Window Kit	--
①	*	Rear Window	1

* Part supplied with kit only and not available separately.

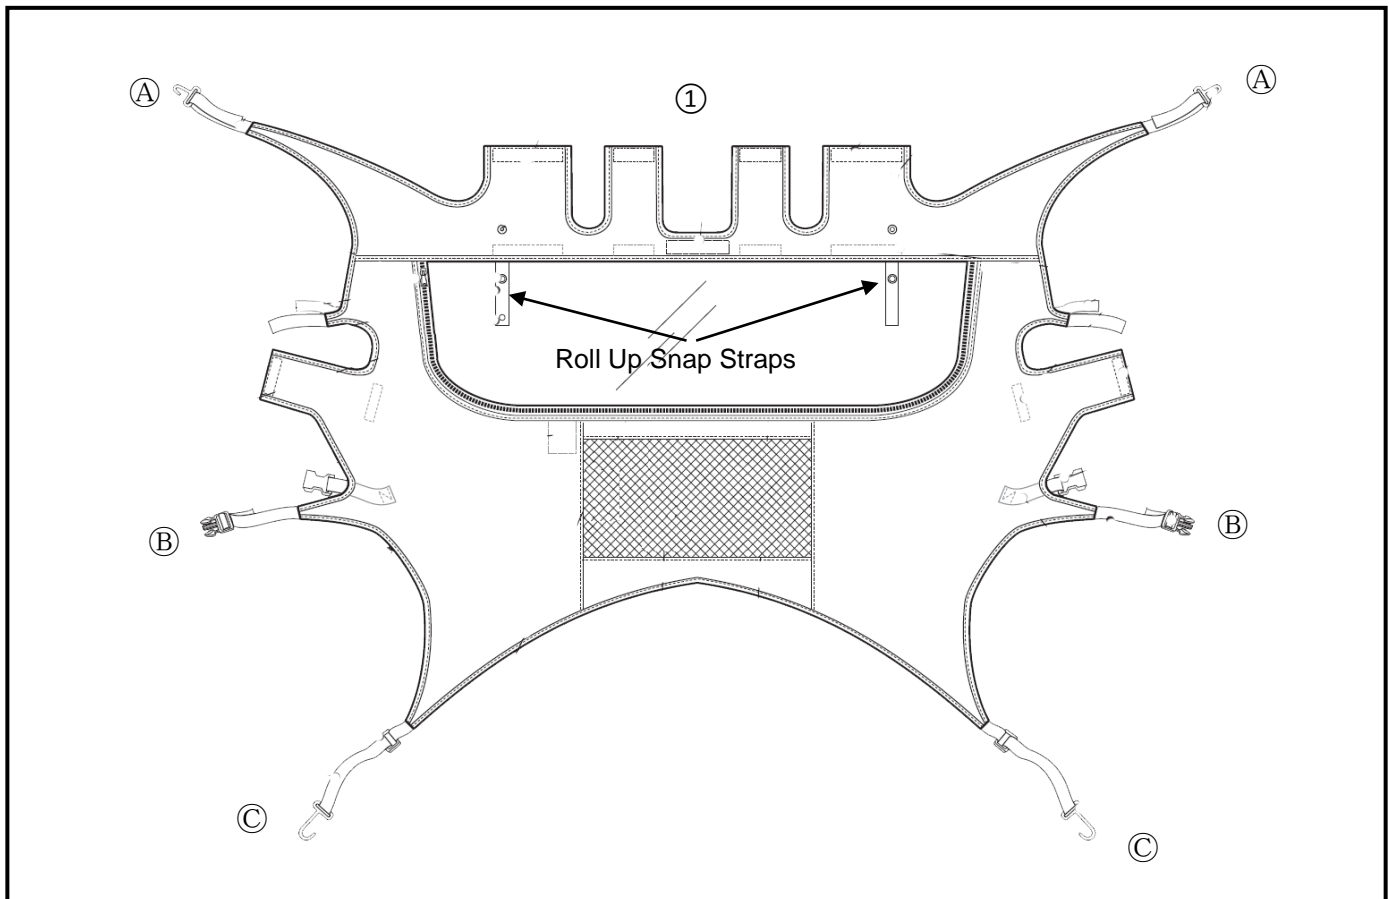

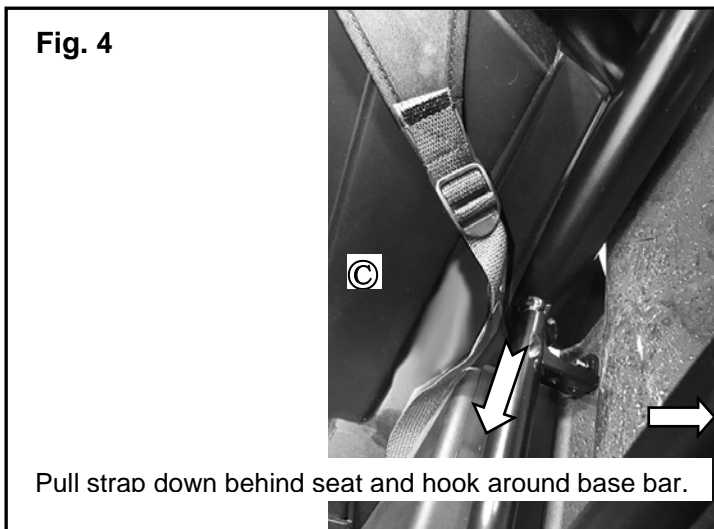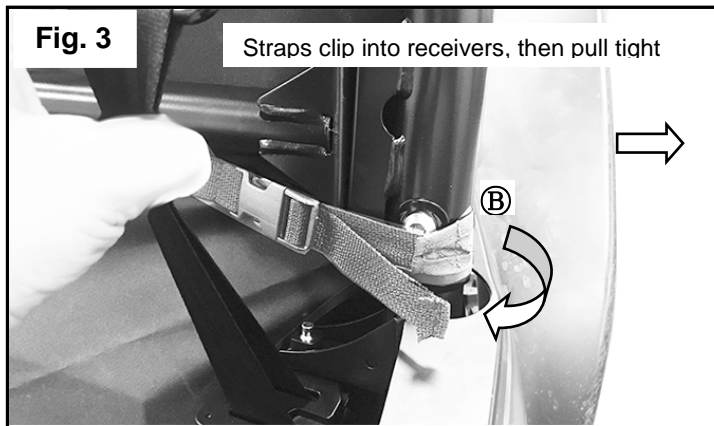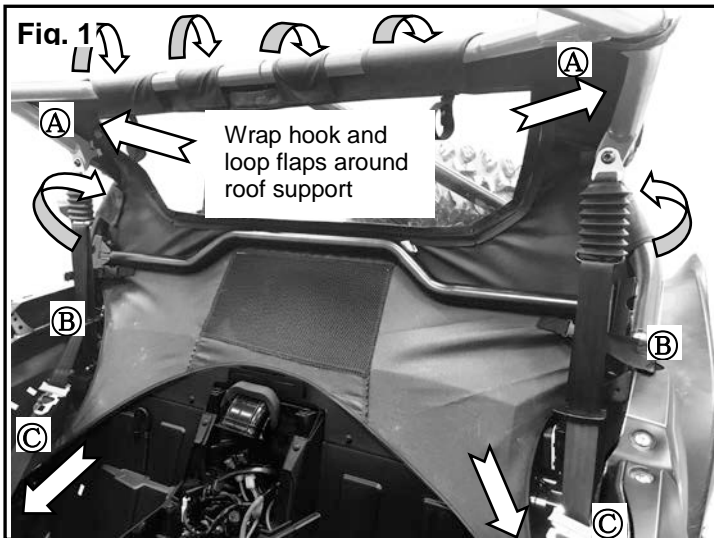

PREPARATION:

- Place the vehicle on a secure and level surface.
- Set the parking brake.
- Clean the mount surfaces before starting installation.

INSTALLATION:

1. Slide the soft rear window behind the ROPS cross bar, but in front of the Radiator duct. Wrap the hook and loop pads, as shown in Fig. 1, around the rear ROPS tube.
2. Working from the rear of the vehicle cab, remove the bolts on both sides that secure the rear 'B' pillar of the Sun Top to the ROPS tubes. Lift the edge of the SunTop enough to fit the hooks through the gap between the Suntop and ROPS tubes (see Fig. 2). Soft Rear Window between the Suntop and ROPS tubes.
3. On the right side, pull the strap with a hook down into the area behind the seat and hook over the bar along the base of the cab as shown in Fig. 4. Repeat this step on the left side.
4. Wrap straps around the roof support bar and clip them into receivers (Fig. 3).
5. Wrap hook and loop flaps and straps around the roof support bar and close the flap to the hook and loop pad sewn in place (Fig. 1).
6. The window can be unzipped, rolled up, and secured with the snap straps hanging from the top of the window opening.
7. Install the two bolts you removed in step 2 to re-attach the center rear roof support to the roof.

⚠ WARNING

Do not operate the vehicle with the side and rear windows closed if the Folding Windshield is installed and in the open position. This configuration creates increased pressure inside the vehicle and may damage the rear and/or side windows.

MAINTENANCE:

Periodically, check torque and tightness on hardware and straps. Re-torque or re-tighten any loose hardware. If zippers become hard to operate, apply Shurhold Snap Stick™ to lubricate the zippers and snaps.

CARE AND CLEANING:

Use a clean soft cloth and mild detergent with warm water to clean the side covers. Rinse and dry. Use Yamaha Windshield & Visor Plastic Cleaner & Conditioner (p/n ACC-PLASP-OL-11) to clean the plastic windows.

CUSTOMER SERVICE:

For further information see your Yamaha dealer.

ESTIMATED TIME TO INSTALL: 0.5 HR