

# INSTALLATION INSTRUCTIONS

DESCRIPTION: Front Grab Bar Kit

PART NUMBER: 18P-F84L0-N1

MODEL: '19~ YFZ450R



## ⚠ WARNING

Please read and understand these instructions completely before installation to avoid possible injury, or damage to the accessory or vehicle.

## NOTICE:

Installation of this kit requires a torque wrench and should be performed by an authorized Yamaha dealer or other qualified mechanic.


## WARRANTY INFORMATION:

In the United States, see your Yamaha dealer for a copy of the Yamaha Genuine Parts and Accessories Limited Warranty Statement.

## DEALER OR INSTALLER:

These instructions contain important information for future reference and must be given to the customer.


## PARTS LIST:

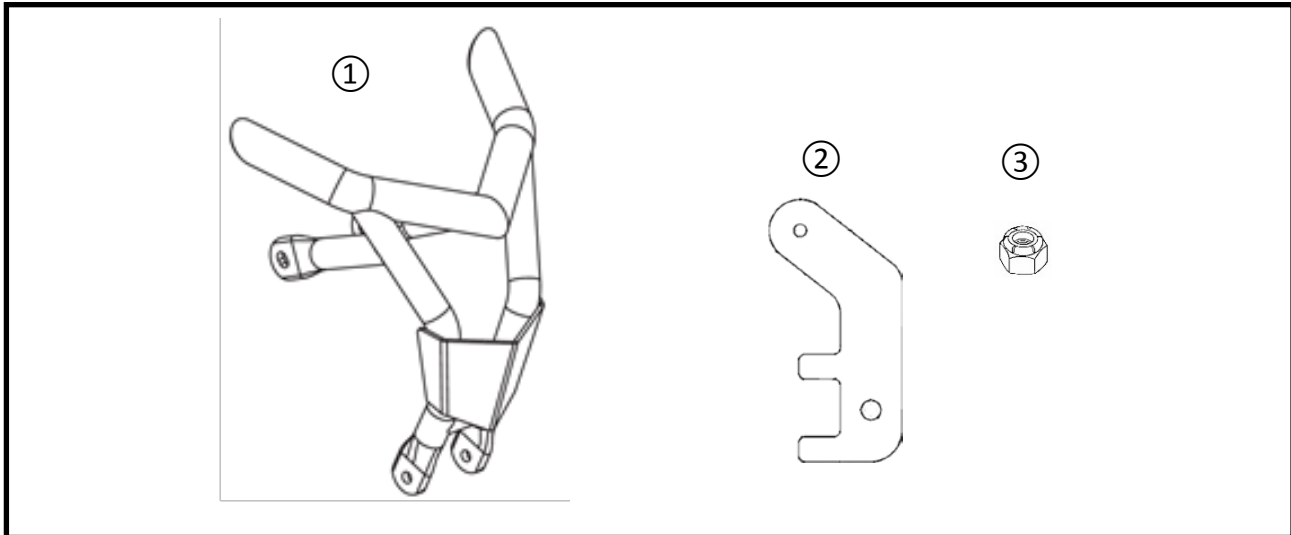

No.	Part Number	Description	Qty
*	18P-F84L0-N1	Front Grab Bar Kit	--
①	*	Front Grab Bar	1
②	*	Bracket	2
③	*	M5 Nut	2

\* Part supplied with kit only and not available separately.

Fig. 1

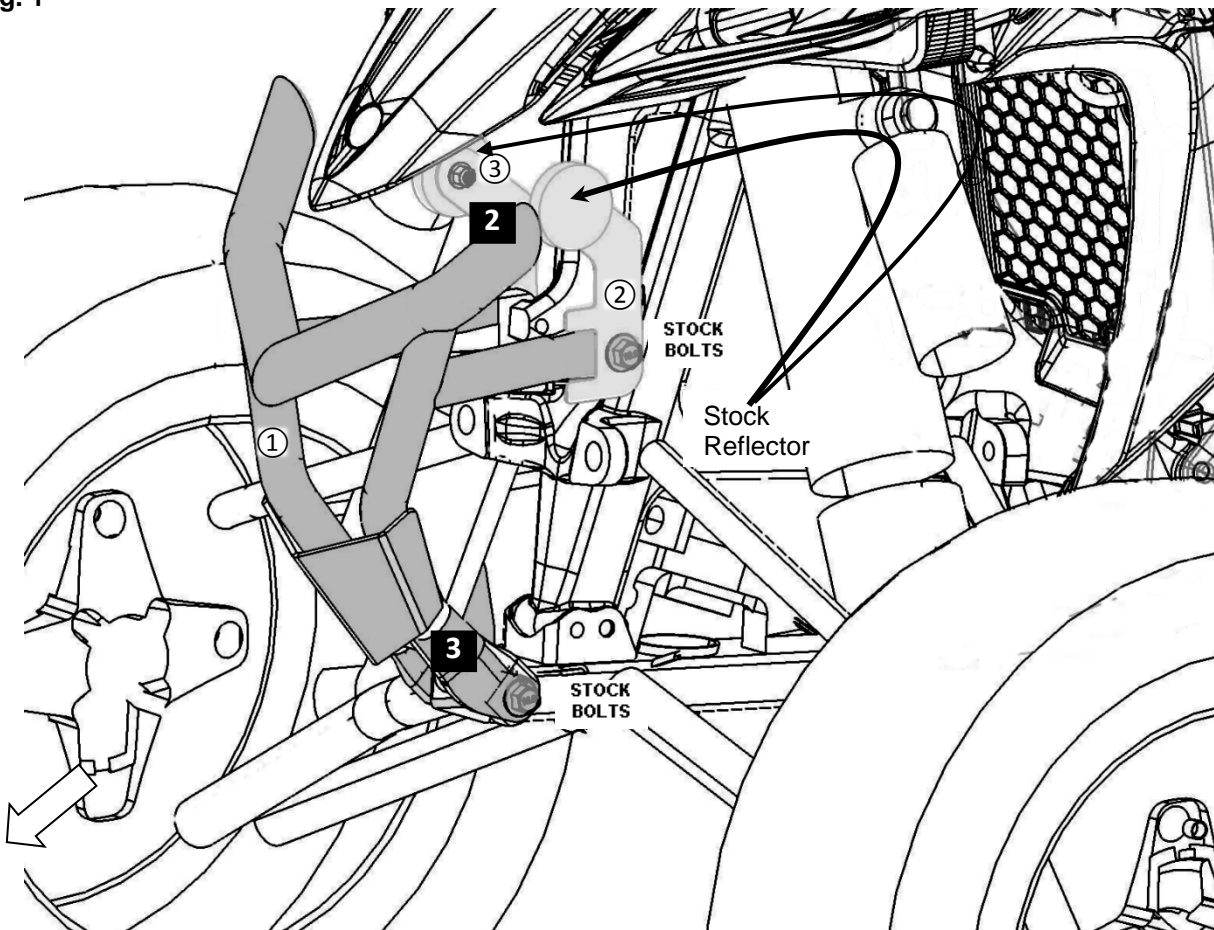

#### PREPARATION:

- Place vehicle on a secure and level surface.
- Set the parking brake.
- Clean all mounting surfaces before installation.

#### INSTALLATION:

- 1** Remove the stock front grab bar. The stock grab bar is not reused. Retain the mount bolts and nuts. Remove the stock reflectors from the grab bar. Retain them for reuse.
- 2** Install the reflector mount brackets to the SE front grab bar ①. Install the reflectors to the reflector mount brackets. Thread on the 5mm nuts and tighten to secure. See Fig1.
- 3** Install the GYTR SE front grab bar ① onto the stock grab bar mount locations. Use the stock bolts and nuts from step 1.
- 4** Torque front grab bar mount bolts to 31 Nm (22 ft • lb).

#### MAINTENANCE:

Check mount bolts and re-torque if necessary.

#### CARE AND CLEANING:

Wash with a mild soap and water solution using a soft cloth.

#### CUSTOMER SERVICE:

For further information see your Yamaha dealer.

#### ESTIMATED TIME TO INSTALL: 0.1 HRS.