

INSTALLATION INSTRUCTIONS

DESCRIPTION: Endurance Windscreen Kit
PART NUMBER: BS7-F83J0-V0
MODEL: '19~ YZF-R3



⚠ WARNING

Please read and understand these instructions completely before installation to avoid possible injury, or damage to the accessory or vehicle.

WARRANTY INFORMATION:

In the United States, see your Yamaha dealer for a copy of the Yamaha Genuine Parts and Accessories Limited Warranty Statement.

NOTICE:

This installation requires a torque wrench and should be performed by an authorized Yamaha dealer or other qualified technician.

DEALER OR INSTALLER:

These instructions contain important information for future reference and *must* be given to the customer.

PARTS LIST:

No.	Part Number	Description	Qty.
--	BS7-F83J0-V0	Endurance Windscreen Kit	--
①	*	Windscreen	1

* Part supplied with kit only and not available separately.

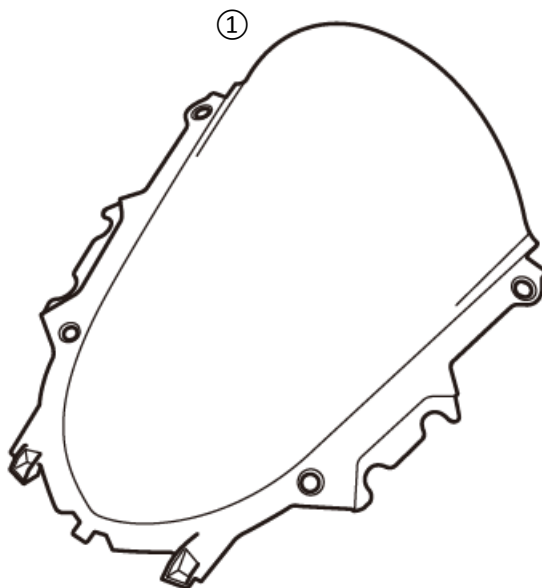


Fig. 1

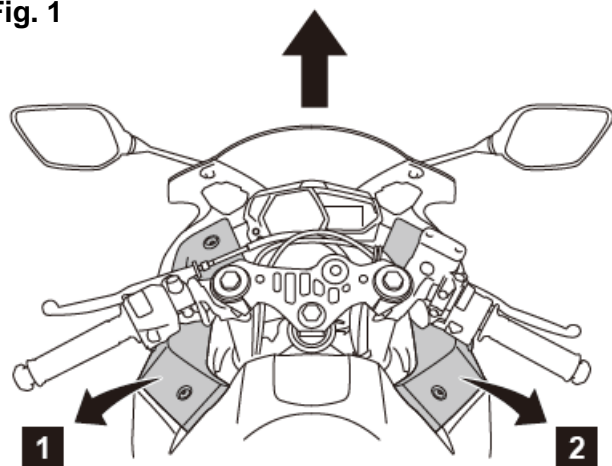


Fig. 2


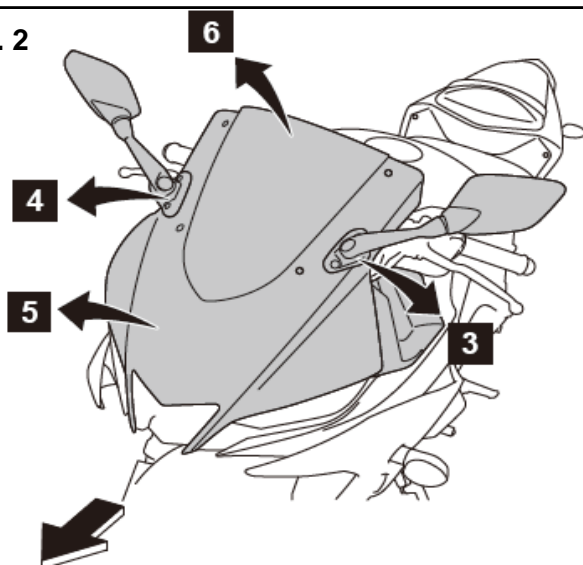


Fig. 3

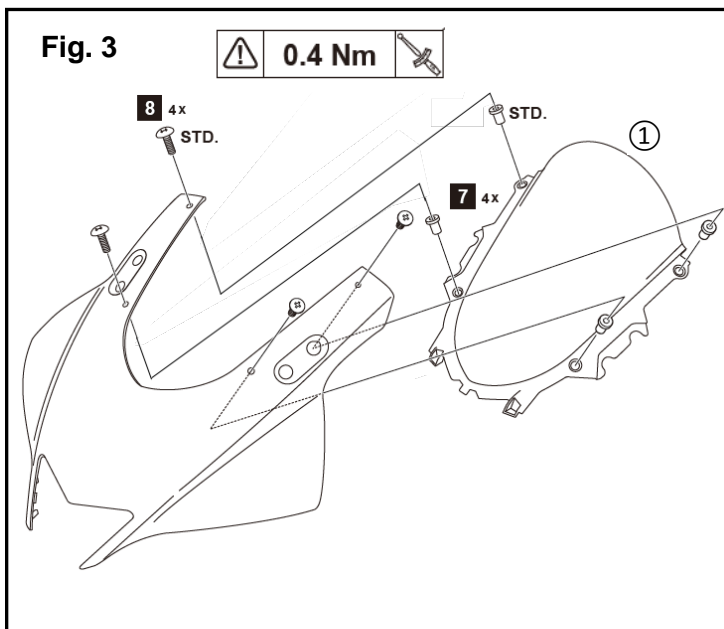

PREPARATION:

- Stand motorcycle on a secure and level surface.
- Clean all mounting surfaces before beginning installation.

INSTALLATION:

Note: All hardware is reused in this installation. Only the windscreen is replaced.

- 1 Remove the left side cockpit fairing. See Fig.1.
- 2 Remove the right side cockpit fairing. See Fig.1.
- 3 Remove the left side mirror. See Fig. 2.
- 4 Remove the right side mirror. See Fig.2.
- 5 Remove the center fairing. See Fig.2.
- 6 Remove the stock windscreen. Remove the well nuts from the four mount points of the stock windscreen. See Fig.2.
- 7 Install the stock well nuts to the Windscreen ① as shown in Fig. 3.
- 8 Install 4 mount screws to secure the Windscreen ① to the center fairing. These screws thread into the well nuts. Torque to 0.4Nm (3.5 in-lb).
- 9 Reinstall the center fairing, right side mirror, left side mirror, right side cockpit fairing, and left side cockpit fairing.

MAINTENANCE:

Periodically, check torque on all hardware. If loose hardware is found, re-torque to specification.

CARE AND CLEANING:

Clean the windscreen with a cloth or sponge dampened with a neutral detergent, and after cleaning, thoroughly wash it off with water. For additional cleaning, use Yamalube® Windshield & Visor Plastic Cleaner & Conditioner (ACC-PLASP-OL-11).

NOTICE:

- Avoid using any alkaline or strong acid cleaner, gasoline, brake fluid, or any other solvent.
- Some cleaning compounds for plastics may leave scratches on surfaces of the windshield. Before using them, test by polishing an area which does not affect your visibility.

CUSTOMER SERVICE:

For further information see your Yamaha dealer.

ESTIMATED TIME TO INSTALL: 0.4 HRS.