

INSTALLATION INSTRUCTIONS

DESCRIPTION: Radiator Guard Kit

PART NUMBER: B2G-E24D0-V0

MODEL: '18 ~ XSR700



⚠ WARNING

Please read and understand these instructions completely before installation to avoid possible injury, or damage to the accessory or vehicle.

NOTICE:

This installation requires a torque wrench and should be performed by an authorized Yamaha dealer or other qualified technician.

WARRANTY INFORMATION:

In the United States, see your authorized Yamaha dealer for a copy of the Yamaha Genuine Parts and Accessories Limited Warranty.

DEALER OR INSTALLER:

These instructions contain important information for future reference and must be given to the customer.

PARTS LIST:

No.	Part Number	Description	Qty.
--	B2G-E24D0-V0	Radiator Guard Kit	--
①	*	Radiator Cover	1

*Part supplied with kit only and not available separately.

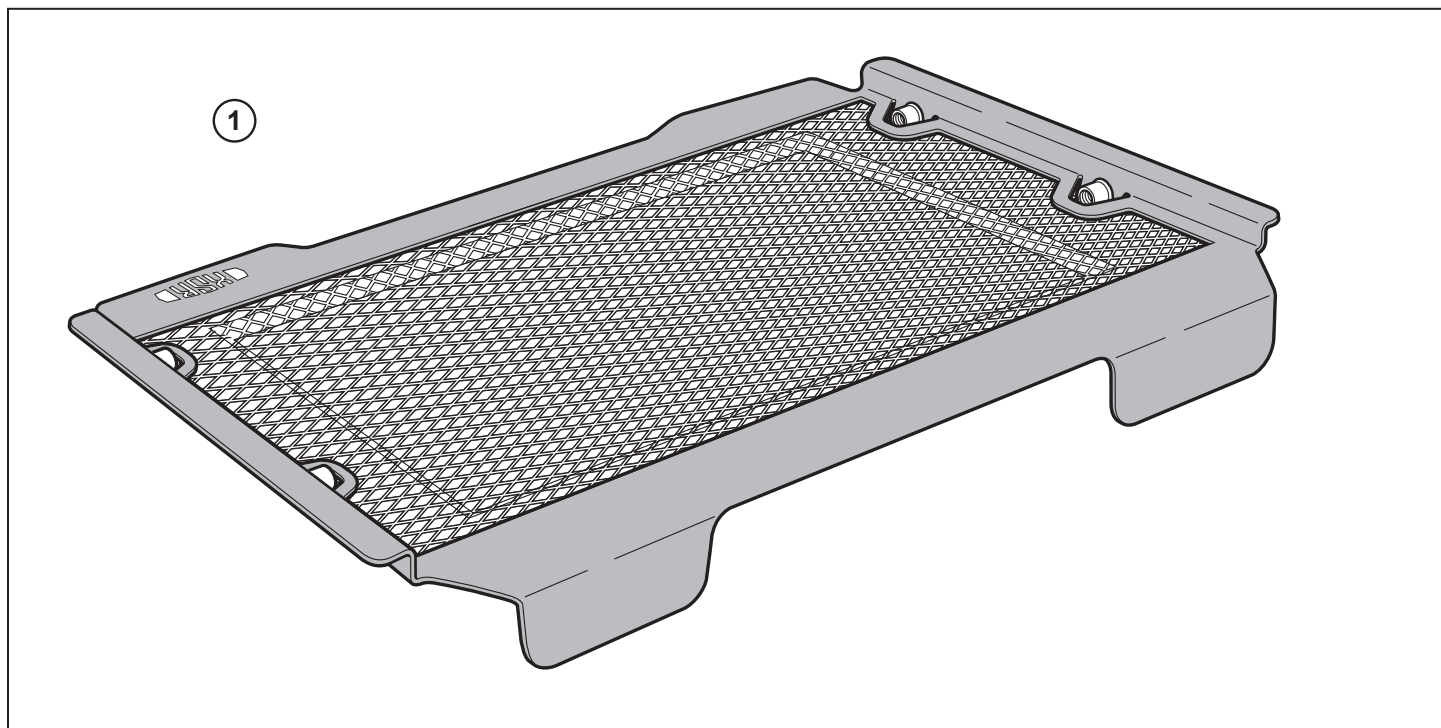


Fig. 1

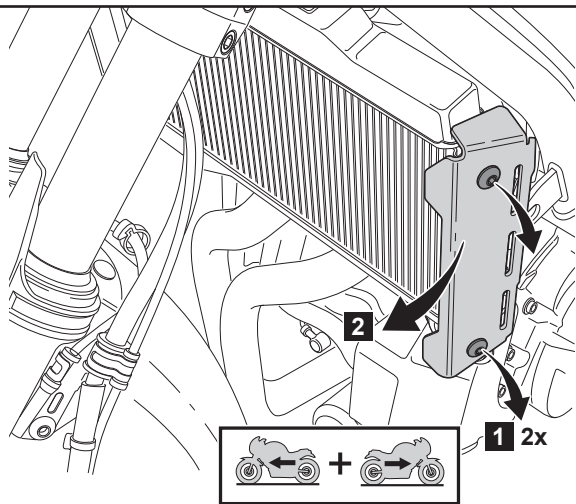


Fig. 2


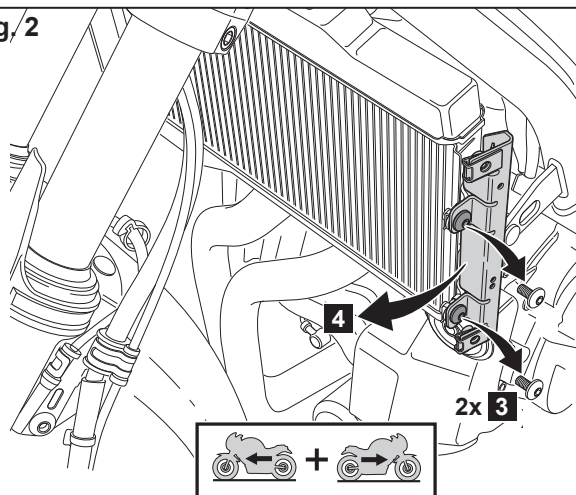


Fig. 3

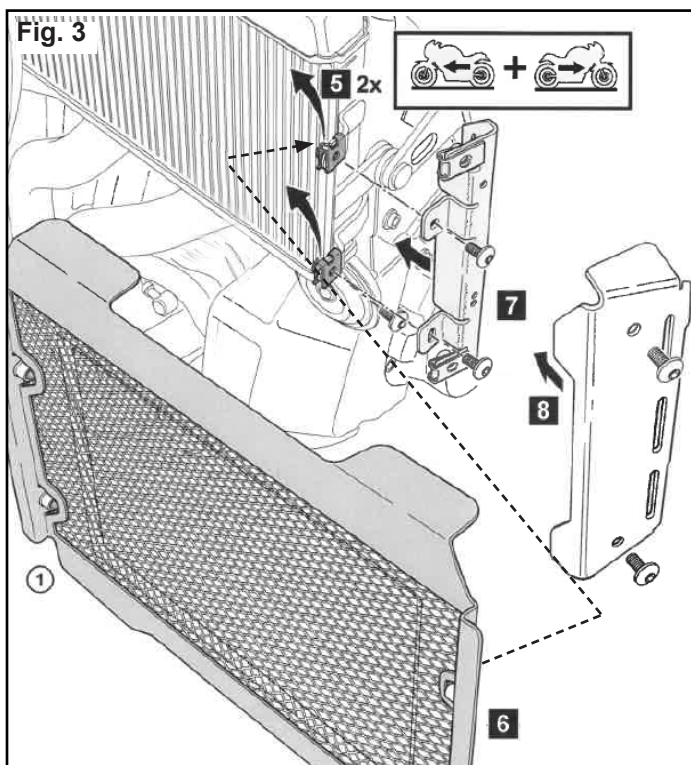

PREPARATION:

- Stand motorcycle on a secure and level surface.
- Clean all mount surfaces before beginning installation.
- Retain all bolts and fittings for reuse.
- Refer to Service Manual for more information.

INSTALLATION:

- 1** Remove the 2 radiator side cover mount screws (see Fig.1).
- 2** Remove the radiator side cover (see Fig.1).
- 3** Remove the 2 retaining screws from the radiator side cover mount (see Fig. 2).
- 4** Remove the radiator side cover mount.
- 5** Remove the two radiator side cover clips (see Fig. 3).

Repeat steps 1 thru 5 on the other side.

- 6** Position the radiator cover onto the radiator and ensure mount holes align (see Fig. 3).
- 7** Reinstall the radiator side cover mount with 2 screws removed in step 3. Torque to 7Nm (0.7m-kgf, 5.1 ft-lbf).
- 8** Install the side radiator cover using the 2 stock screws removed in step 1. Torque to 7Nm (0.7m-kgf, 5.1 ft-lbf)

Repeat steps 7 and 8 on the other side.

MAINTENANCE:

Periodically, check torque on all hardware. If loose hardware is found, re-torque to specification.

CARE AND CLEANING:

Clean painted metal parts with a clean soft cloth and mild soap and water. Rinse and dry.

CUSTOMER SERVICE:

For further information see your Yamaha dealer.

ESTIMATED TIME TO INSTALL: 0.5 HR