

INSTALLATION INSTRUCTIONS

DESCRIPTION: GYTR Clutch Cover Kit
PART NUMBER: GYT-1C335-10-AL
MODEL: YZ125

GYTR[®]

 **YAMAHA**
GENUINE
Parts & Accessories

DEALER OR INSTALLER:

These instructions contain important information for future reference and *must* be given to the customer.

⚠ WARNING

Please read and understand these instructions completely before installation to avoid possible injury to yourself, or damage to the accessory or vehicle.

IMPORTANT: YZ models are for closed-course competition only regardless of modification. YZ models do not meet federal or state emission standards for recreational off-road use.


NOTICE:

Installation of this kit requires specialized tools, and training, as well as the Owner's Service Manual for the model. This installation should be performed by an authorized Yamaha dealer or a qualified mechanic.

WARRANTY INFORMATION:


- Genuine Yamaha GYTR accessories for YZ are covered by a 30-day warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. See your Yamaha dealer for a copy of the warranty statement.

PARTS LIST:

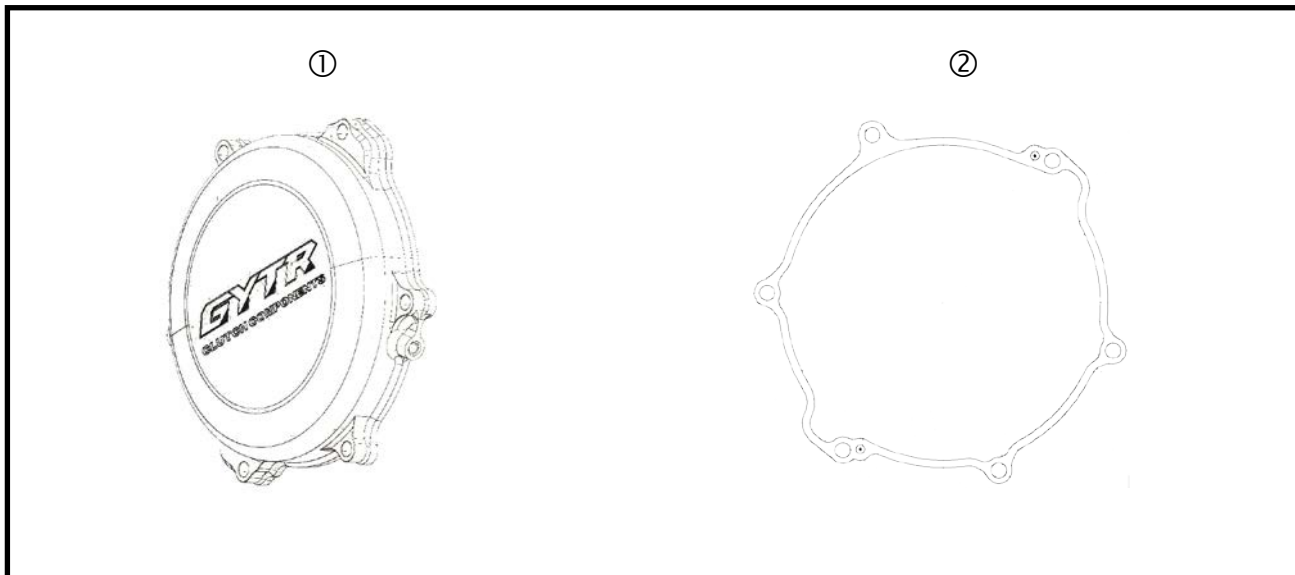

No.	Part Number	Description	Qty
--	GYT-1C335-10-AL	GYTR Billet Clutch Cover Kit	--
①	*	Clutch Cover	1
②	*	Gasket, O-ring	1

*Part supplied with kit only and not available separately.

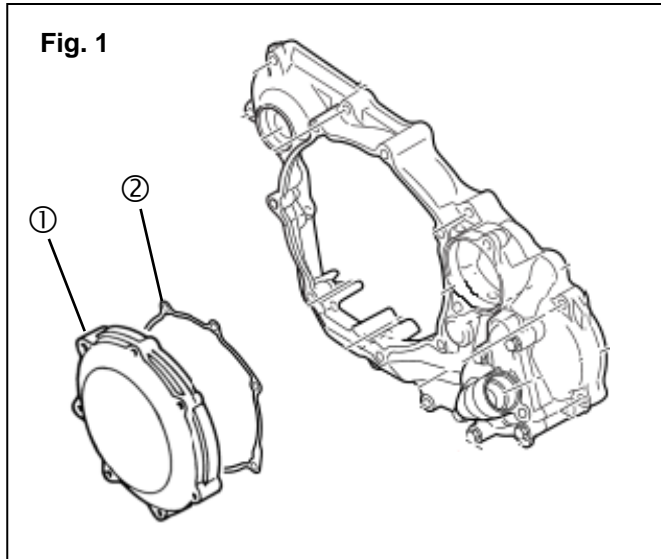

PREPARATION:

1. Stand the motorcycle on a secure and level surface.
2. Clean all mounting surfaces before beginning installation.

INSTALLATION:

1. Remove the stock clutch cover referencing the Yamaha Owner's Service Manual. Retain all hardware as it will be reused.
2. Reference the Yamaha Owner's Service Manual to Install the GYTR Clutch Cover ① and gasket ② using the stock hardware. (Fig. 1)
3. Reinstall the oil check bolt. Torque the bolt to 10 Nm (1.0 m • kgf, 7.2 ft • lbf). (Fig. 2)
4. Torque clutch cover bolts to 10 Nm (1.0 m • kgf, 7.2 ft • lbf).

TIP: Tighten the clutch cover bolts in stages, using a crisscross pattern

MAINTENANCE:

Periodically check all clutch cover bolts for tightness and re-torque as necessary.

CARE AND CLEANING:

Wash using a mild soap and water solution and soft cloth.

CUSTOMER SERVICE:

For further information see your Yamaha dealer.

ESTIMATED TIME TO INSTALL: 0.1 HRS.

