

⚠ WARNING

Please read and understand these instructions completely before installation to avoid possible injury to yourself, or damage to the accessory or vehicle.

CAUTION:

- This installation should be performed by an authorized Yamaha dealer or a qualified mechanic. Some components require information from the model's service manual for proper installation or adjustment. Be sure to have the service manual on hand, if necessary, before proceeding with the installation.
- Alteration of emission-related components constitutes tampering under Federal and State laws and can lead to substantial fines and penalties if used other than in closed-course competition.
- Engine-related competition parts are intended for closed-course racing applications only.

DEALER:

These instructions contain important information for future reference and *must* be given to the customer.

WARRANTY INFORMATION:



- Genuine Yamaha accessories are covered by a 90-day warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. See your Yamaha dealer for a copy of the warranty statement.
- The Limited Warranty provided with new Yamaha vehicles has exclusions for certain failures, including those caused by competition or racing use (except YZ and WR motorcycle models) as well as by abnormal strain or abuse. While installation of these components will not "void" your vehicle's warranty, specific failures adjudged by Yamaha to have resulted from the installation of accessory components or other modifications, or from competition use (except YZ and WR motorcycle models), may not be covered by warranty or Yamaha Extended Service.

PARTS LIST:

This kit contains the following components. Before beginning installation confirm there are no missing or damaged components.

Item #	Part Number	Description	Qty
--	1XD-F16G0-V0	Mud Flap Kit	1
1	*	Flap	2
2	*	Left Flap Plate	1
3	*	Right Flap Plate	1
4	*	Bracket	2
5	*	Hex Bolt with Washer	16
6	*	Washer	4
7	*	Flange Nut	4

* Part supplied with kit only and not available separately.

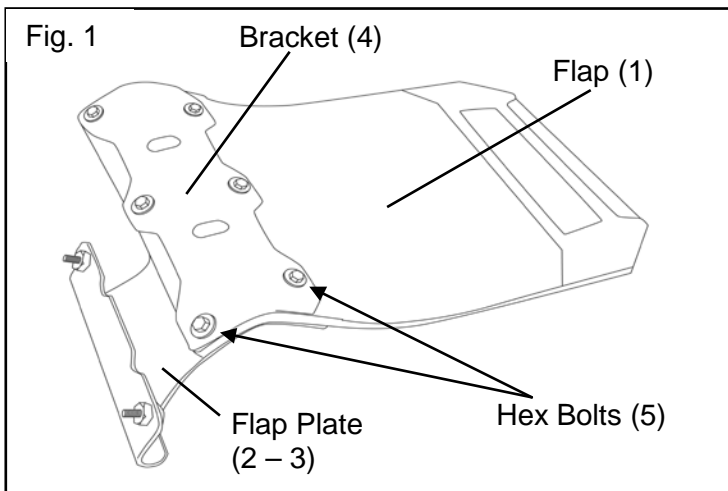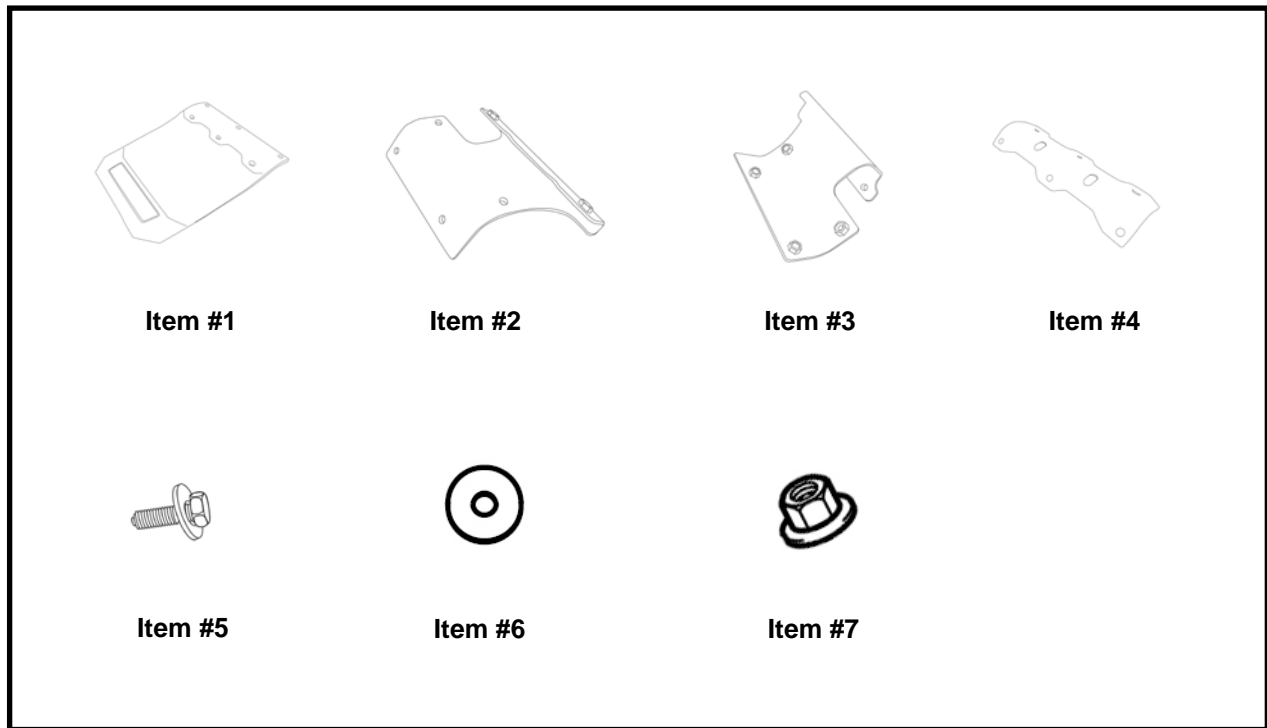

PREPARATION:

1. Place vehicle on a secure and level surface.
2. Set the parking brake.
3. Clean all mounting surfaces before beginning installation.

INSTALLATION:

1. Assemble the left hand mud flap using flap (1), flap plate (2), bracket (4), hex bolts with washers (5) as shown in (Fig. 1).
2. Install the two washers (6), flange nuts (7), with the hex bolts with washer (5) towards the outside edge of the flap as shown in (Fig. 2).
3. Assemble the right hand flap plate following steps 1 and 2.
4. Fit the mud flaps on the vehicle using two hex bolts with washers (5) per each side of the vehicle as shown in (Fig. 3).


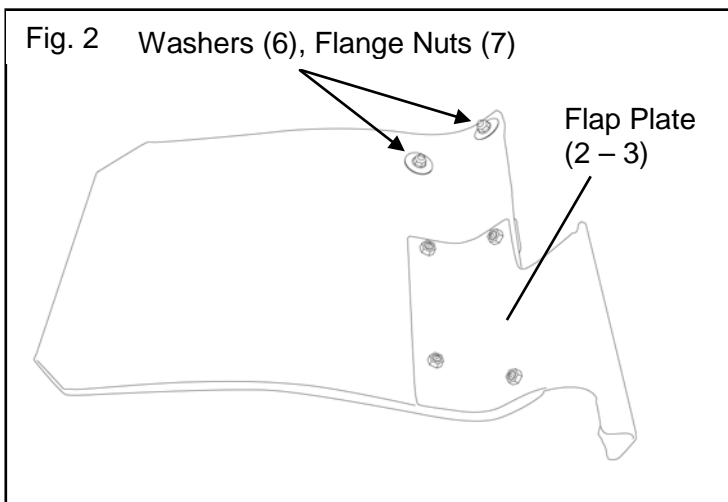


Fig. 3

Hex Bolts with Washers (5)

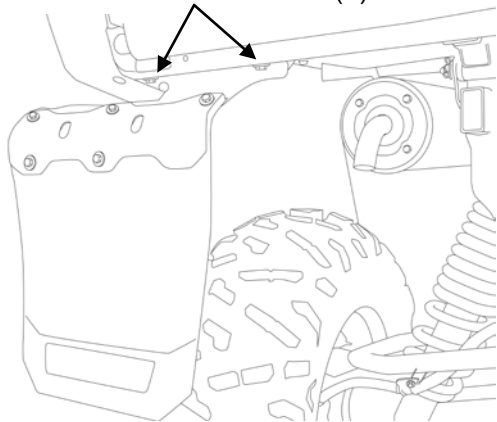

MAINTENANCE:

Periodically check all hardware and re-tighten as required.

CARE AND CLEANING:

Wash using a mild soap and water solution and soft cloth.

CUSTOMER SERVICE:

For further information see your Yamaha dealer.

ESTIMATED TIME TO INSTALL: 0.4 HRS