



INSTALLATION INSTRUCTIONS
SE Front Grab Bar
18P-F84L0-N0
YFZ450R

**⚠ WARNING**

Please read and understand these instructions completely before installation to avoid possible injury to yourself or damage to the accessory or vehicle.

CAUTION:

This installation should be performed by an authorized Yamaha dealer or a qualified mechanic. Some components require information from the Model's Service Manual for proper installation or adjustment. Be sure to have the Service Manual on hand, if necessary, before proceeding with the installation.

DEALER:

These instructions contain important information for future reference and *must* be given to the customer.

WARRANTY INFORMATION:

- Genuine GYTR components are covered by a 30-day warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. See your Yamaha dealer for a copy of the warranty statement.
- The Limited Warranty provided with new Yamaha vehicles has exclusions for certain failures, including those caused by competition or racing use (except YZ and WR motorcycle models) as well as by abnormal strain or abuse. While installation of these GYTR components will not "void" your vehicle's warranty, specific failures adjudged by Yamaha to have resulted from the installation of accessory components or other modifications, or from competition use (except YZ and WR motorcycle models), may not be covered by warranty or Yamaha Extended Service.

PARTS LIST:

This kit contains the following components. Before beginning installation, confirm there are no missing or damaged components.

Item	Part Number	Description	Qty
--	18P-F84L0-N0	SE Front Grab Bar Kit	--
①	*	Front Grab Bar	1

*Part supplied with kit only and not available separately.


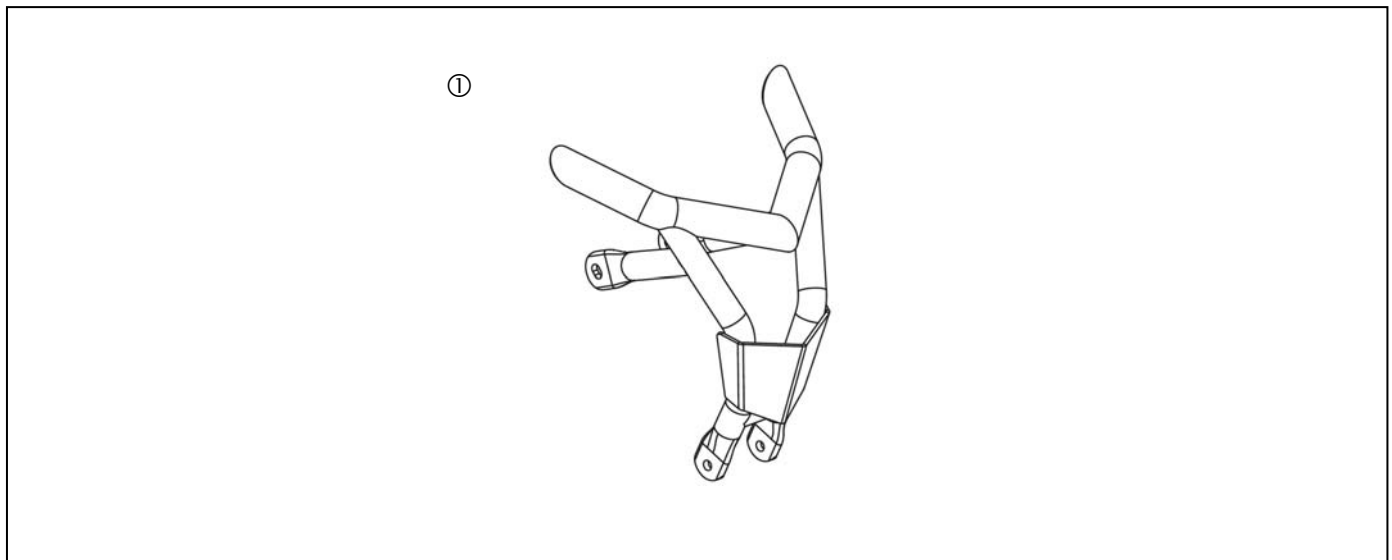


Fig. 1

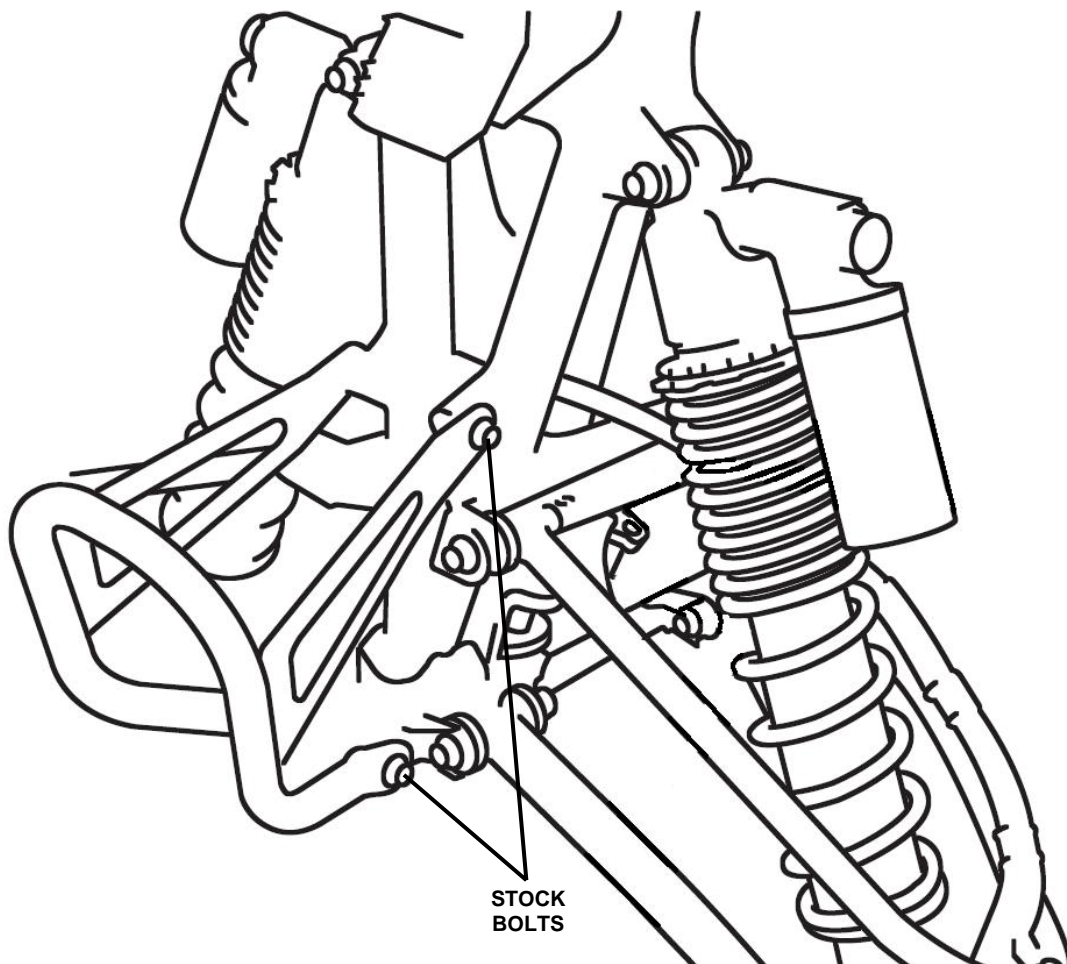

PREPARATION:

1. Place ATV on a secure level surface and set the parking brake.
2. Clean all mounting surfaces before beginning installation.
3. Remove the stock front grab bar. Retain all hardware as it will be reused (Fig. 1) (Refer to the Service Manual).

INSTALLATION:

1. Install the GYTR SE front grab bar ① onto the stock grab bar mounting locations.
2. Secure grab bar in place using the stock hardware.
3. Torque bolts to 31 Nm (22 ft • lb).

MAINTENANCE:

Periodically, check all hardware for looseness and re-torque as required.

CARE AND CLEANING:

Wash using a mild soap and water solution and a soft cloth.

CUSTOMER SERVICE:

For further information, see your Yamaha dealer.

ESTIMATED TIME TO INSTALL: 0.1 HRS